




Discovery

Underground **S**urveyor **A**pparatus

USER'S GUIDE

Underground Surveyor Apparatus

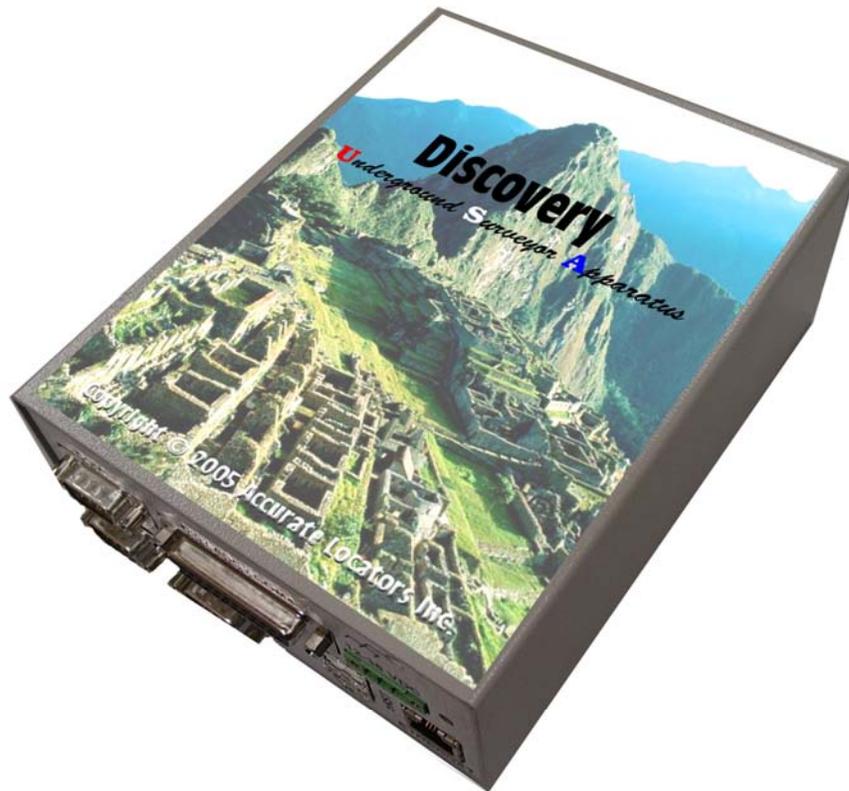

DISCOVERY User's Guide

Copyright © 2008 Accurate Locators Inc. All rights reserved.
Duplication of this manual strictly prohibited in either print, electronic,
or any other media without express writ of consent from Accurate Locators Inc.

USA *DISCOVERY* User Manual 7/1/2008

Table of Contents

Section I

Introduction	6
Existing Potential Method (USA)	7
What EM Measures	7
Magnetic Surveying	7
What Magnetic Measures	7
Principles of Magnetics	8

Section II

Packing Contents	11
Install Instructions for Product (USB Storage/CD)	12
Unit Assembly	21
Connecting the Control Unit	22
Detailed Photos of Unit Assembly	23

Section III

Software Introduction	37
Screen Breakdown	38
Top Menu Bar	39
Status Bar	42
Side Menu Bar	42
Keyboard Shortcuts	43
Analysis of Scanned Data	44
2D Measurement Mode	47
Nulling a High Signal	49

Section IV

Unit Operation	51
Quick Start Guide (Normal Grid)	52
Quick Start Guide (Tunnel Scan)	53
Grid Pattern	54
Importance of the Grid Pattern	55
Tunnel & Void Locating	56
Searching an Area	58
Double-X-ing a Target	59
Determining Approximate Depth of Point	60

Section V

Examples	63
Geo Pinpointer	66
Common Errors	72

Section VI

Troubleshooting	73
Unexploded Ordnances (UXO)	74
Alternative Power Supply Instructions	76
Resetting / Configuring IP address connection	
<i>(Windows Vista Operating system configuration)</i>	79
<i>(Windows XP,2000 Operating system)</i>	85
Technical Specifications	88
Training	89
Limited Warranty	90

Notes

Unit Serial Number: _____

Introduction

Thank you for your purchase of the Underground Surveyor Apparatus (USA). Before operating the unit, please read this manual thoroughly and retain manual for future reference. With the UNDERGROUND SURVEYOR, you will be able to locate anomalies, buried objects and faults. The SURVEYOR works on the principle of detecting electromagnetic field changes that are emitted from the Earth.

With the UNDERGROUND SURVEYOR, there is no need to transmit a signal into the earth, because of the existing signals that are already present in the earth. The SURVEYOR has very sensitive broadband receivers, enabling it to receive electromagnetic and magnetic signals. When there is an item buried in the ground, a FERF (Free Electron Radiation Field) is created enabling the receiving antennas in the UNDERGROUND SURVEYOR to identify its presence. When a hole is dug, it creates a scar on the Earth's surface; this scar is visible to the SURVEYOR. Like any other detector ever built, it is looking for the difference, which enables the operator to locate anomalies.

The software that was created exclusively for the USA is designed to highlight items in the ground, anomalies, disturbances, etc... You can see subsurface objects in *Real-Time* with the *GeoSurveyor 3-D Software*. Also a feature that assists in detecting a target area is *Auto Ground Balancing*. *Auto Ground Balancing* defines the compensation for the varying amount of minerals in the soil by sensing the mineralization and automatically adjusting the ground balance to achieve the best performance, thus producing a more "clearly defined target area". One of the main items to note is to do a large enough scan allowing you to see the background. When scanning in only one small area, determining the difference between the target and the background can be somewhat difficult. Another note to remember is to isolate suspected targets so that there is only one target per scan. This way you will be able to determine the approximate size of the object. As advancements in the software are available you may purchase upgrades, critical updates will be available free of charge. Please contact your sales representative for more information.

It is very important to read this manual through completely. If there are problems, our technical support staff will be able to assist you in the better understanding of the unit and its functionality. Our technicians will assist you in analyzing data and operation of the unit. In addition, a technician will explain the analyzed data giving you one-on-one attention. Personalized training courses are also available at Accurate Locators in Oregon, USA. We have a dedicated test facility with buried objects of both Ferrous and Non-Ferrous metals. The training requires an entire afternoon and is by appointment only. Please contact your sales representative for more information on obtaining premium technical support services and personalized training for your unit. Of course, every unit comes with one (2) hours of free telephone technical support. A free product demonstration, not to exceed two (2) hours can be scheduled at the Accurate Locators, or Imaging Locators test sites.

Existing Potential Method (USA)

When using specifically designed sensors the earth's self-potential of direct currents can be measured. The sensors become very useful when using a single forward motion just above, without contacting, the earth. With this rather simple technique, the geophysicist can trace zones of mineralization, having a strong signal, or tunnels having a weak signal. By receiving a combination of AC/DC and frequency to map potentials, we can map fields of interest. These rapidly changing signals are amplified and analyzed by the software. The UNDERGROUND SURVEYOR allows for the rapid collection and interpretation of large quantities of data, making it a cost-effective technique. EM equipment measures the background of the emitted signals from the earth; it then detects any differences that are present. Differences can be caused by anything in the subsurface that has disturbed the earth (like a void, metal objects, fault, tunnels, etc...). Other available geophysical techniques that are sensitive to the presence of both ferrous and non-ferrous metal objects include metal detectors, pulse induction, resistivity, ground penetrating radar, etc...

What EM Measures

EM measures the apparent electromagnetic field of the ground, including effects of the soil, bedrock fractures, contaminants, metal objects, and ground water. Variations in the electromagnetic field may indicate changes in composition, layer thickness, or moisture content. The presence of buried metal such as drums, and/or other objects create a large variation. The UNDERGROUND SURVEYOR is specifically designed to detect subsurface anomalies by receiving varying signals from the ground.

Magnetic Surveying

Magnetic surveying is ideal for both reconnaissance and focused surveys. It is expedient and cost-effective, covers more ground in less time, and requires a minimum of field support. The portability of the instruments makes magnetic surveying well suited to sites with topographic variations.

What Magnetic Measures

Magnetic surveys measure the earth's magnetic field very accurately. Buried ferrous materials, and in some cases, changes in bedrock lithology, produce disturbances in the local magnetic field that can be readily detected by magnetic surveys. The UNDERGROUND SURVEYOR instrument is one such device that takes measurements in order to find anomalies that lie beneath the surface. Instruments like the "Discriminator", uses "Pulse Induction" to measure conductivity and in combination with a Magnetometer to discriminate ferrous and to see non-ferrous objects.

Principles of Magnetism

The earth's geomagnetic field has three principal components: the main field itself, an external field and local perturbations superimposed on the main field. Caused by processes in the interior of the earth, the main field has a large magnitude which varies slowly over time. At present, the earth's field amplitude (T) ranges from a low of about 25,000 nanoTeslas (formerly gamma) (nT) near the geomagnetic equator to almost 70,000nT at the geomagnetic poles. The field inclination is horizontal at the equator and vertical at the poles. The external field originates outside the earth's crust and is associated mainly with electric currents in the ionized layers of the outer atmosphere because of interaction with the solar winds. Traveling along magnetic flux lines solar winds are ionized plasma or hot-charged particles, which transmit energy by wave motion. Local variation in the rock and mineral assemblage of the near-surface crust produce local perturbations that are the anomalies of exploration interest.

The earth's magnetic field (a vector field having both amplitude and direction) is described by an intensity (total field intensity, T), an inclination (I) and a declination (D), Figure 1.1. For Specific applications, horizontal and vertical field components can be derived from T, D, and I

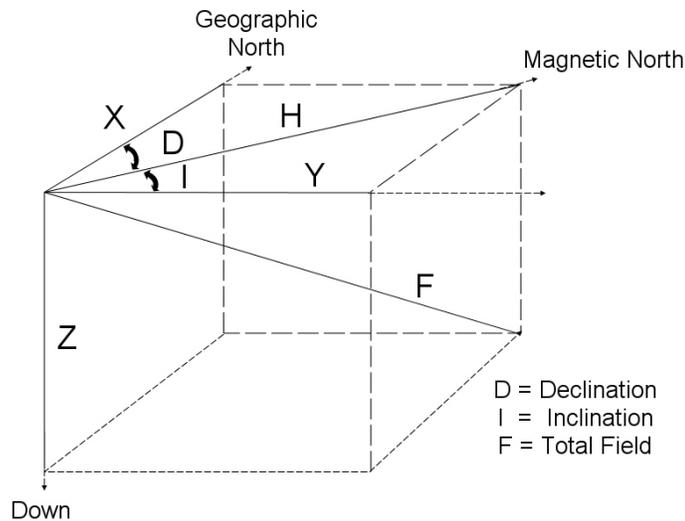


Figure 1.1

(MAGNETICS CONTINUED)

Rock units in the crust acquire a magnetization in the direction of the earth's field, which is referred to as induced magnetization or magnetic polarization. The resulting induced field of a typical finite source body is dipolar: that is, it contains positive and negative elements. In the middle-to-high magnetic latitudes of the Northern Hemisphere, the dipolar nature of an induced anomaly is typified by a positive (high) and related, but subdued, negative (low) on its north side.

Anomalies of interest range in amplitude from a few nanoTeslas (nT) for deep basement or sedimentary anomalies to 1,000's of nT for near-surface mafic rocks or iron formation to 10,000's nT for magnetite iron ore deposits.

Several time-variant or temporal variations occur in the geomagnetic ambient field. A long period, or secular change, occurs slowly over many decades or centuries and modifies inclination, declination and intensity. Such a change can be observed as a change in the magnetic declination as noted on old maps when compared to today's version. A complete reversal of the total field direction, occurring over tens-to-hundreds of thousands of years, is a more dramatic effect of the secular change.

More important to prospecting are the diurnal variations. A diurnal variation of 10 – 100+ nT occurs regularly on a daily basis, (Breiner, 1973). This diurnal is also related to solar winds, the small effects of which vary with the level of the ionosphere and intensity of solar winds. Micro pulsations of 0.001 to 10s nT are random effects lasting from 0.02 to tens of minutes. Magnetic storms also produce a short period random "noise" which may vary up to many 100s nT over periods of a few minutes to hours. Storm effects are unpredictable but are related to and follow solar flaring, commencing abruptly and decreasing slowly over hours or days.



Principles of Magnetism are an excerpt from:
Practical Geophysics II for the Exploration Geologist
© 1992 Northwest Mining Association
ISBN: 0-931986-05-2

Section II

Packing Contents

(Standard and Optional Accessories Shown)

1. Field Pack (front and rear pack)
2. Battery in pack
3. DISCOVERY Control Unit in Pack
4. Pre-Configured Laptop*
5. DISCOVERY Control Unit
6. Carrying Case**
7. DISCOVERY Multi-Sensor Antenna
8. Control Unit Battery and charger***
9. Additional Laptop Power Supply (Optional)
10. Wiring Harness
11. Geo Pinpointer Antenna

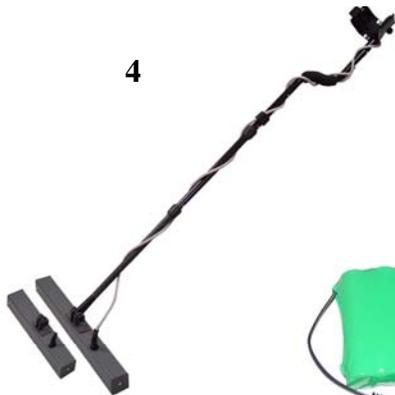

7

8

9



10



11

*Laptop makes and model subject to change without notice.

**Upgraded Pelican® watertight carrying case shown


***Standard Battery shown. Additional batteries are available.

USA USB JUMP DRIVE OR CD INSTALLATION INSTRUCTIONS WINDOWS XP/2000 AND VISTA OPERATING SYSTEM


- FIRST, PLUG IN THE USB JUMP DRIVE INTO THE AVAILABLE PORT, OR PLACE CD IN DRIVE.
- A DIALOG BOX SHOULD POP UP TO ASK: "WHAT YOU WANT WINDOWS TO DO?"
- CLICK ON THE "USA INSTALL DISK" SELECTION, AND THEN PRESS THE "OK" BUTTON (WINXP-2000) OR CLICK CONTINUE WITHOUT SCANNING (WINVISTA).

(WINDOWS XP)


(WINDOWS VISTA)

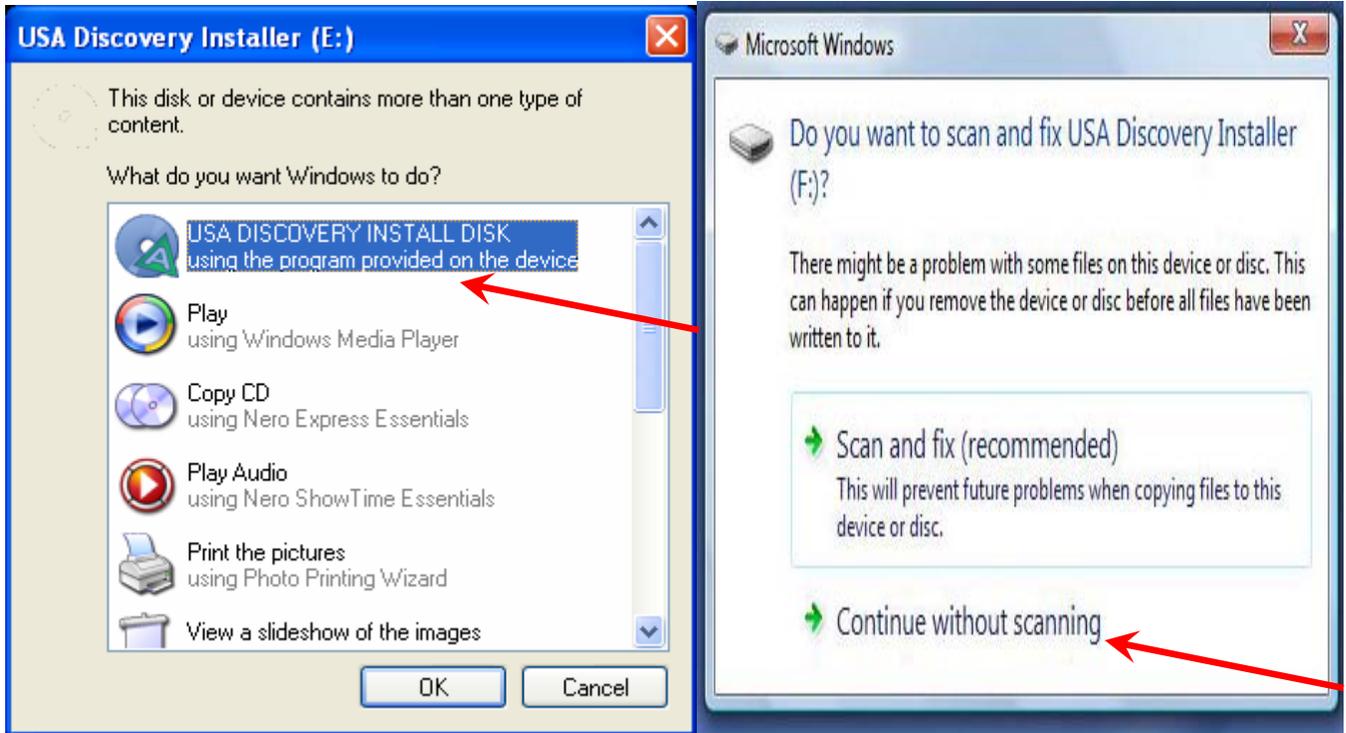


- A MENU SHOULD THEN POP UP ON SCREEN LIKE THIS.
CLICK ON OPTION BUTTON YOU WANT TO INSTALL OR VIEW.

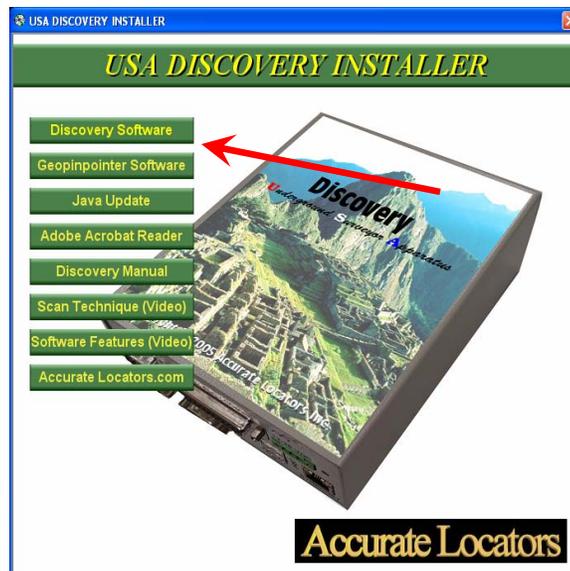


- IF INSTALLING SOFTWARE, THE INSTALLATION WINDOW WILL POP UP.
- FOLLOW THE INSTRUCTIONS TO INSTALL SOFTWARE.

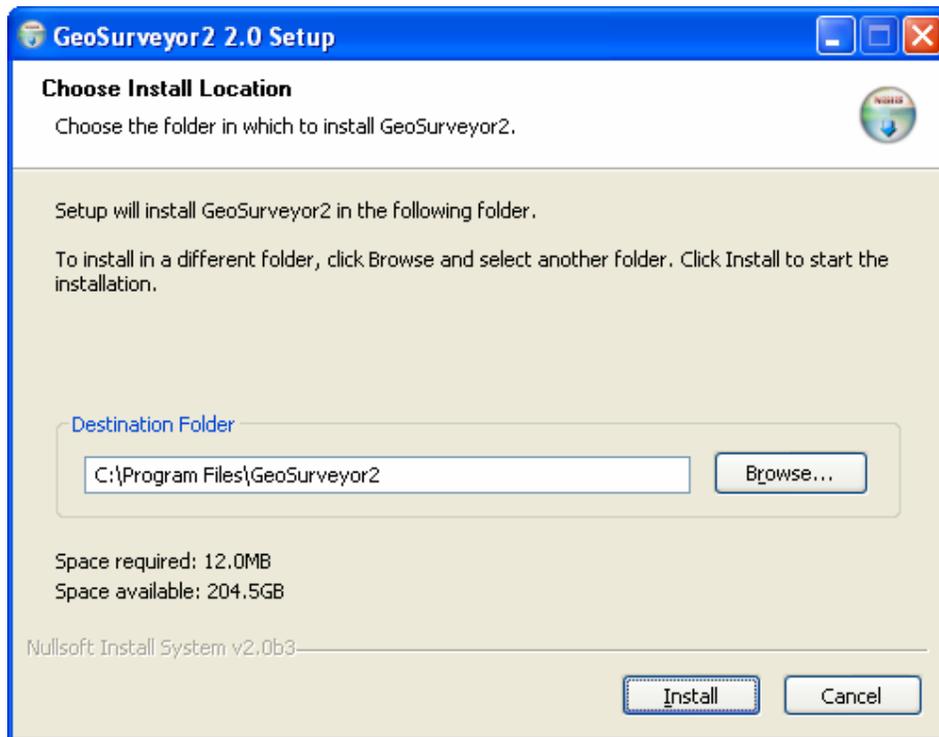


- AFTER INSTALLATION SUCCESS, SELECT "CLOSE" TO EXIT

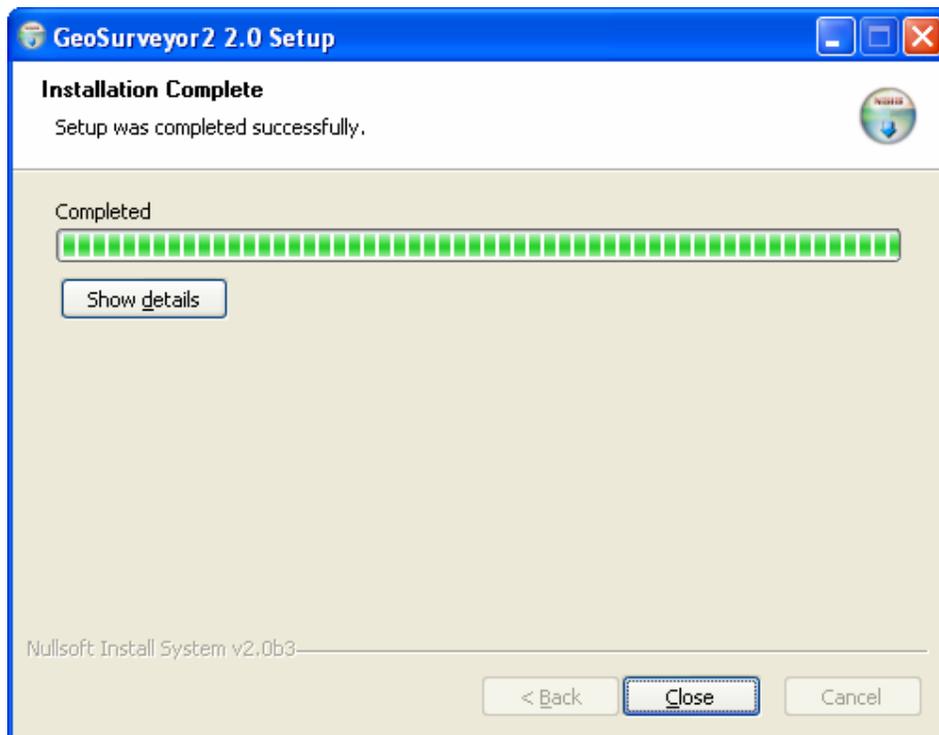

- YOU CAN CHOOSE TO VIEW THE INSTRUCTION MANUAL IN ADOBE ACROBAT (CHOOSE ADOBE ACROBAT READER LINK TO INSTALL PROGRAM TO VIEW).

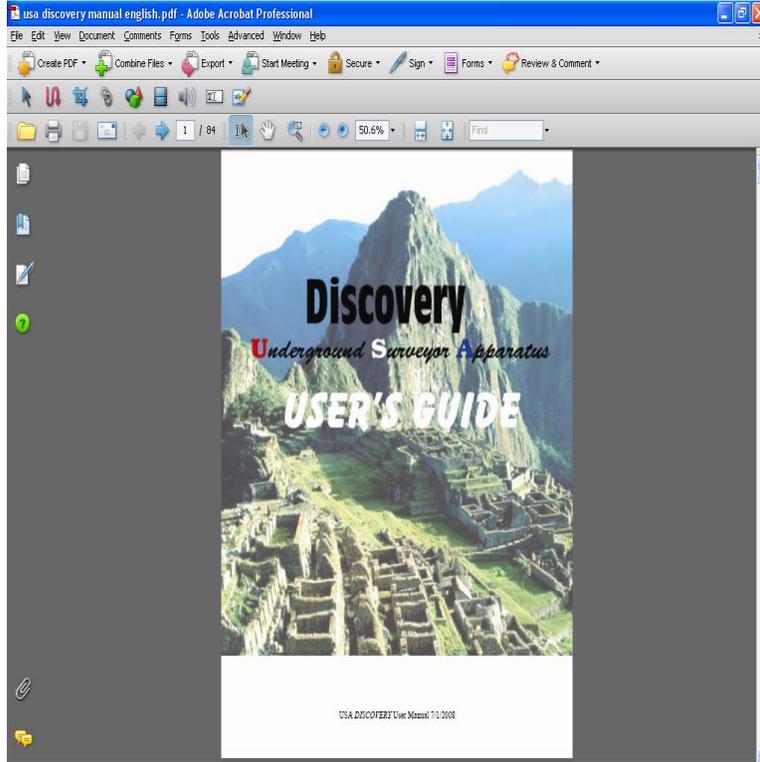

- SELECT BUTTONS TO VIEW INSTRUCTIONAL VIDEO, AND WINDOW WILL POP UP LIKE BELOW AND AUTO-PLAY THE VIDEOS (CONTENT IN WINDOWS MEDIA FORMAT, INSTALLATION OF PLAYER REQUIRED)

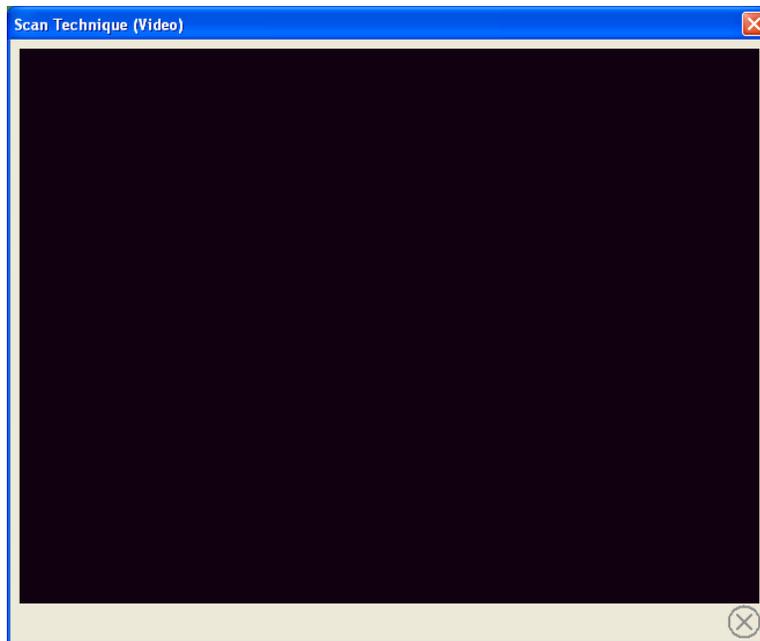


- YOU CAN ALSO SELECT THE BUTTON *ACCURATELOCATORS.COM* BUT IT IS SUGGESTED *NOT* TO GO ON THE INTERNET WITH PRIMARY CONFIGURED LAPTOP, AS PRE-CONFIGURED IP ADDRESS FOR USA IMAGING SYSTEM MAY BE CHANGED AND PLACED WITH AUTO-DETECT IP ADDRESS

(SEE MANUAL FOR IP ADDRESS CONFIGURATION)




- SIMPLY CLICK ON THE RED "X" IN RIGHT-HAND CORNER TO CLOSE AUTO-PLAY MENU

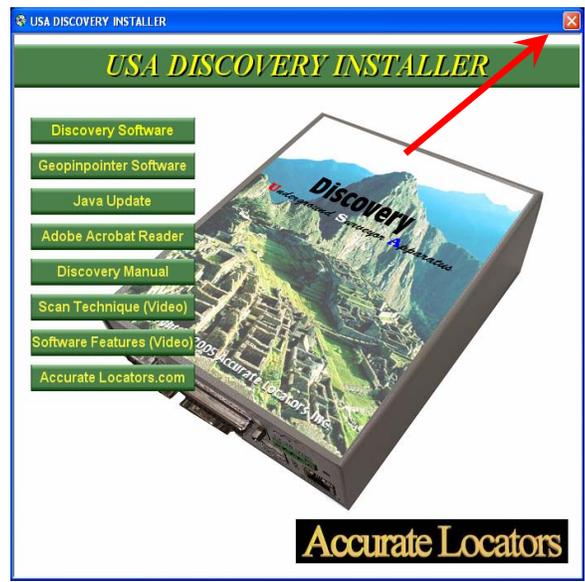


- IF THE AUTO-PLAY MENU DOES NOT START, GO TO "MY COMPUTER"




- AND SELECT THE "USA INSTALLER" DEVICE
(*USB FLASH DRIVE OR CD*)
- DOUBLE CLICK ON THE INSTALLER ICON AND
WILL TAKE YOU TO SUB-FOLDER WITH FILES INSIDE

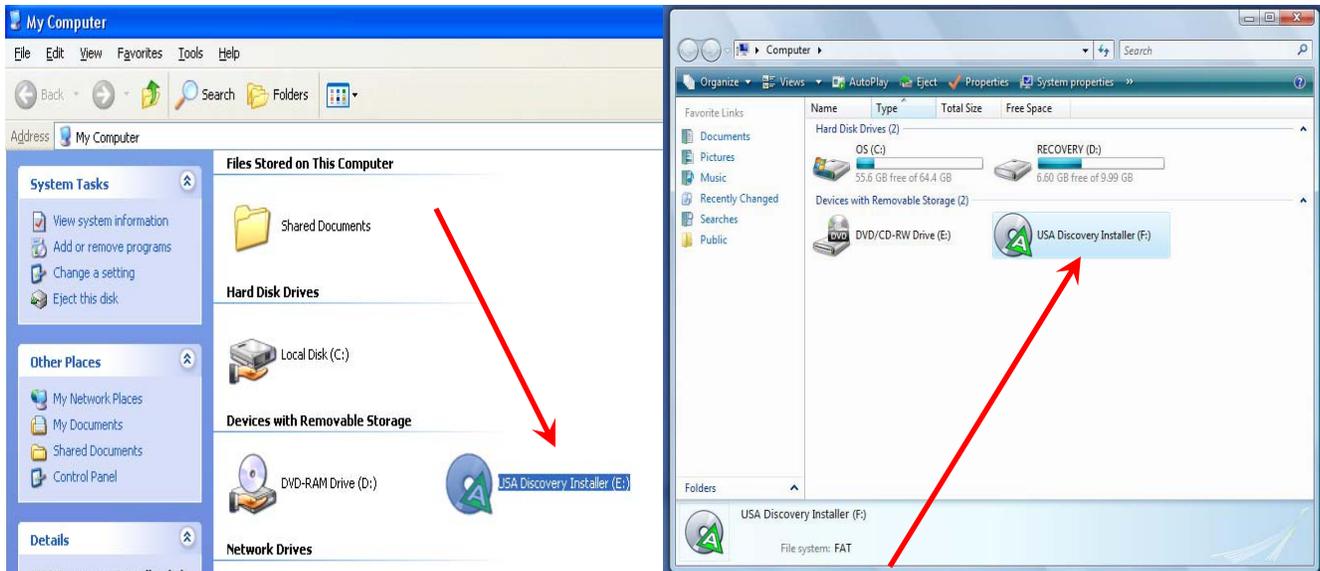

- DOUBLE CLICK ON THE "INSTALLER MENU.exe" ICON

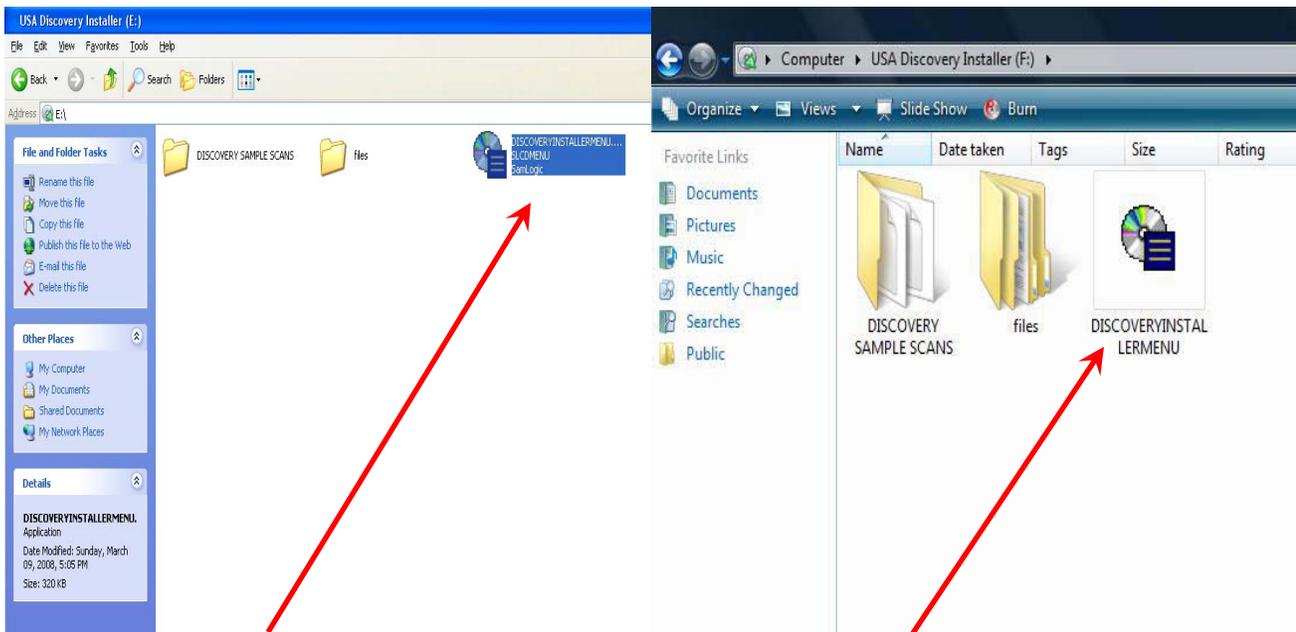


- AND THEN SHOULD BRING UP INSTALLER MENU.

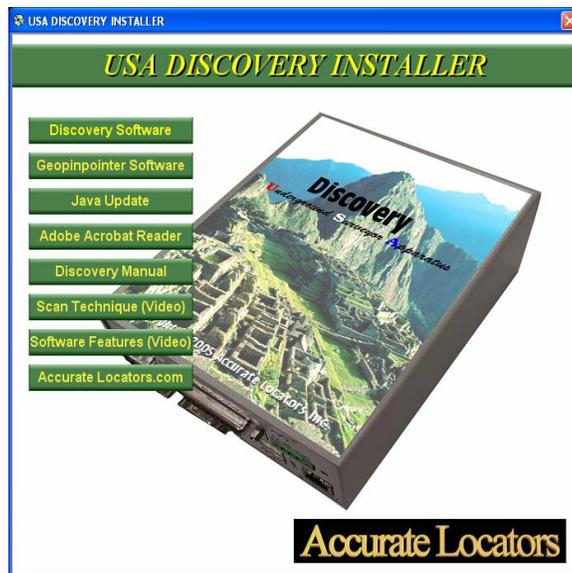


- IN CASE MENU WILL NOT OPEN, INSTALLATION FILES ARE LOCATED IN THE *NON-HIDDEN* FOLDER CALLED "files".

NOTE: NOT ALL SOFTWARE REQUIRED TO OPERATE USA UNIT.
IF YOU ARE UNSURE OF ALL SOFTWARE NEEDED, PLEASE CONSULT AN ACCURATE LOCATORS TECHNICIAN FOR FURTHER INSTALLATION INSTRUCTIONS.

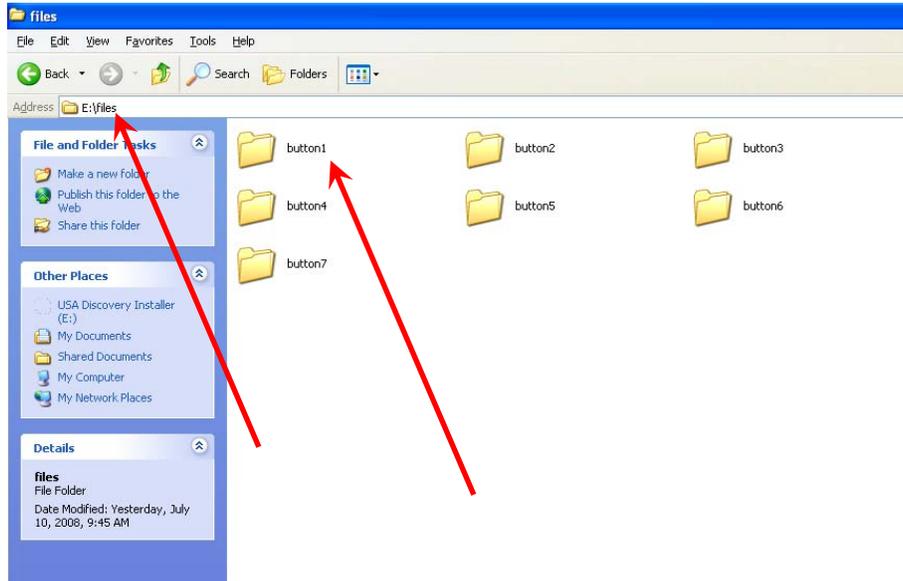

- EACH BUTTON ON MENU IS CONNECTED TO A FILE. BROWSE IN EACH FOLDER FOR VARIOUS SOFTWARES REQUIRED TO OPERATE CERTAIN MODELS.

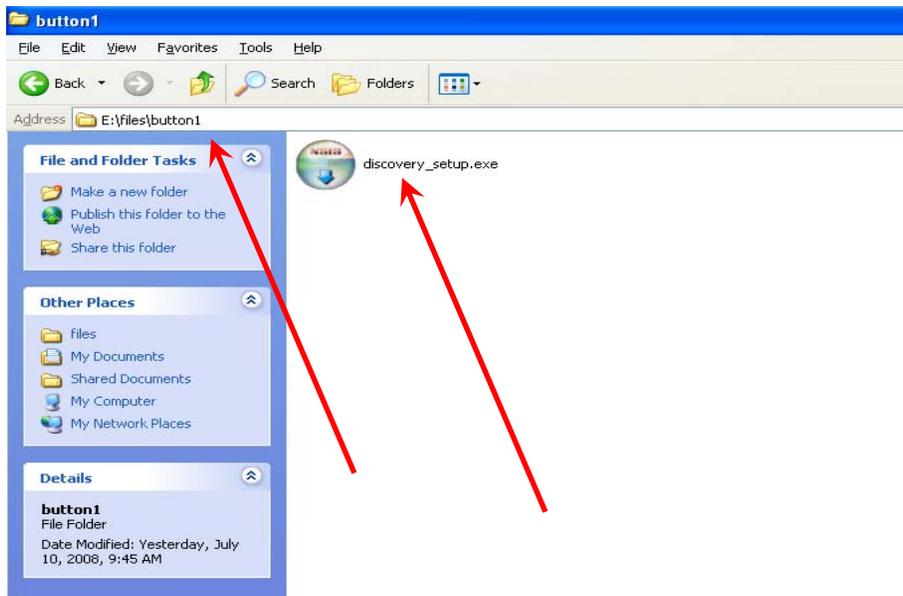


- THERE IS ALSO A "SAMPLE SCANS" FOLDER WITH TESTED SCAN EXAMPLES FOR THE USA UNIT MODEL PURCHASED. TO BE SURE YOU HAVE THE LATEST SCANS FOR YOUR UNIT, SUGGEST COPYING THE FILES IN THIS FOLDER TO YOUR USA SOFTWARE INSTALLATION FOLDER...AND **REPLACING** THE ONES IN INSTALL FOLDER.


- EXAMPLE:

C:\Program Files*name of your unit install*\scans

C:\Program Files*GeoSurveyor Double Magnum*\scans

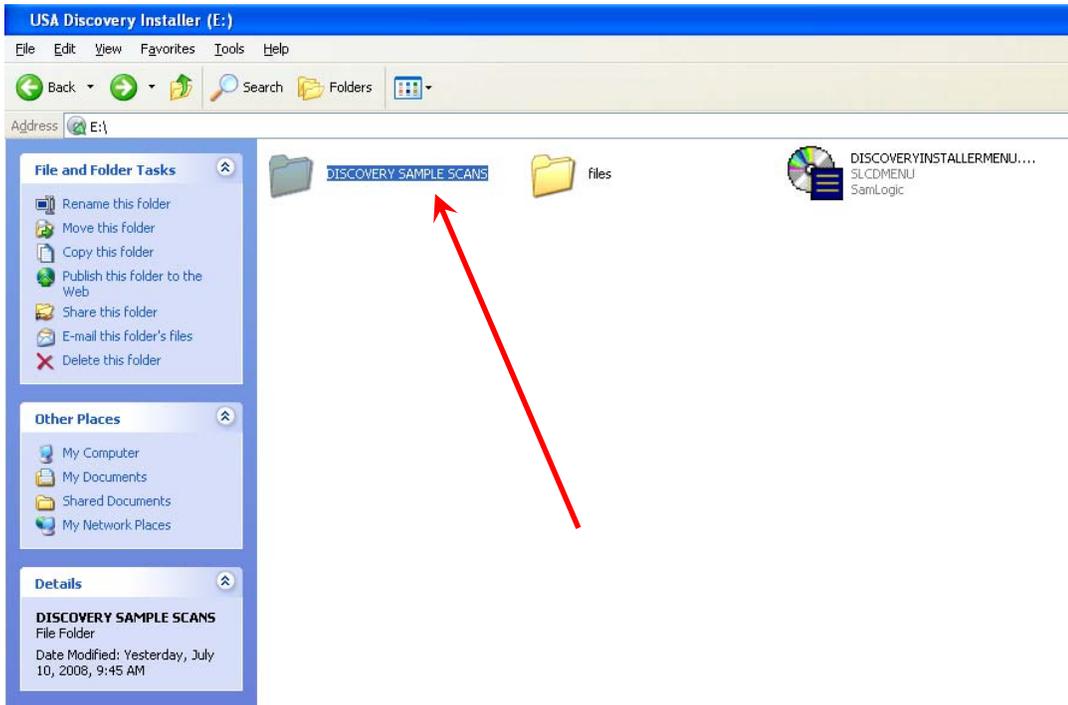

- COPY FILES FROM INSTALL DISK TO GEO-SOFT LOCATION (SEE ABOVE DESCRIPTION)

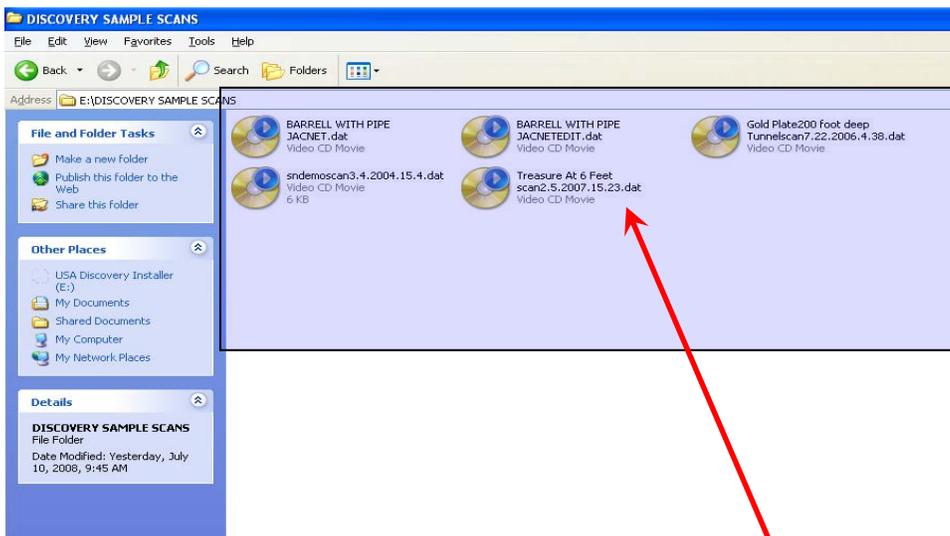

- **IMPORTANT LAST NOTE:**

USA IMAGING SYSTEMS REQUIRE THAT **NO SECURITY FIREWALL** BLOCKING CONNECTION FROM WINDOWS OR OTHER SECURITY SOFTWARE AND IP ADDRESS CONFIGURED TO REQUIREMENT FOR COMMUNICATION FROM COMPUTER SOFTWARE TO CONTROL UNIT.

SCREEN CAPTURES OF IP CONFIGURATION BELOW, OR CHECK THE INSTRUCTION MANUAL **SECTION VI:** "RESETTING/CONFIGURING IP ADDRESS CONNECTION"

WINDOWS VISTA IP CONFIGURATION EXAMPLE

1. After IP address is entered, (192.168.1.253) click subnet mask box below

2. Correct subnet mask will automatically be entered 255.255.255.0

3. After information entered, select the "OK" on all sub-boxes and Configuration complete

WINDOWS XP, 2000 IP CONFIGURATION EXAMPLE

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

Obtain an IP address automatically

Use the following IP address:

IP address: 192 . 168 . 1 . 253

Subnet mask: 255 . 255 . 255 . 0

Default gateway: . . .

Obtain DNS server address automatically

Use the following DNS server addresses:

Preferred DNS server: . . .

Alternate DNS server: . . .

Advanced...

OK Cancel

Unit Assembly



1. Laptop Computer (Fits inside of the Front pack with the screen on the bottom for better viewing.)
2. Battery Supply (Fits inside of the Backpack).
3. UNDERGROUND SURVEYOR Control Unit (Fits inside of the backpack)

In the front pack there is a RJ-45, connect that to the laptop computer and place the computer in the front pack with the laptop screen on the bottom (1)

In the backpack, the battery supply (2) and the control unit (3) are placed in the open area of the backpack.

Connecting the DISCOVERY Control Unit

On the face of the Control Unit, several ports can be connected. **The DISCOVERY does not utilize all of the port connections.*



1. Connect the DIO (Digital Input Output) cable to COM4
2. Connect the Power connector
3. Plug in the RJ-45 into the ETHERNET port

**Presently the Control Units do not use COM1, COM2, COM3 and the USB ports.*

VERY IMPORTANT:

**DO NOT DISCONNECT / CONNECT WITH POWER CONNECTED
FAILURE TO DO SO CAN CAUSE DAMAGE TO INTERNAL CIRCUITRY AND VOID
WARRANTY.**

SAFETY PRECAUTION

Do not let end of battery connection hit metal

Detailed Photos of Unit Assembly



Empty backpack showing all compartments.



In backpack insert control unit into Velcro holder.



Tightly secure control unit with Velcro.



Take wiring harness.



Locate black plug.



Disconnect black plug and set it to the side.



Take "Off/On" box and secure it to Velcro pad located on front pack.



"Off/On" shown on front shoulder strap.



Feed harness wires through shoulder strap.



Harness ends shown on rear shoulder strap.



Reconnect black plug which was placed on the side.



Connect Velcro side of battery to control unit.




Battery shown on back of control unit.



Take green power plug.



Connect green power plug and connect it to control unit.

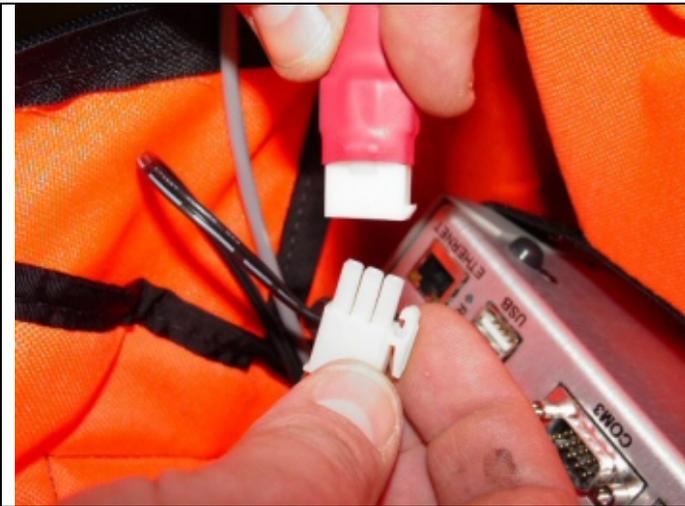

Connect power supply. Possibly round or square ends on power supply.



Power supply connected.



Plug in "Ethernet" cable to control unit.



Control unit with Ethernet cable attached.



Feed Ethernet cable through slot located between shoulder straps.



Feed Ethernet cable through rear shoulder strap



Pull Ethernet cable through front shoulder strap.



On side of front pack open zipper.



Push Ethernet cable through front zipper.



Close zipper.



Feed excess black strap back into shoulder strap/



Repeat for other side.



Shown with both straps tucked into shoulder straps.



Fold center part of front flap.



Be sure that Velcro is on outside.



Secure flap to inside of bag.



Take computer and open the Ethernet port cover.



Insert Ethernet cable into Ethernet port.



Shown with Ethernet cable attached to PC.



At an angle slide PC into front pack.



Slide hands through side slots to align PC in front pack.




Once PC is aligned, secure to front pack.



Open PC and move screen to below the front pack braces.



Shown with PC screen opened.

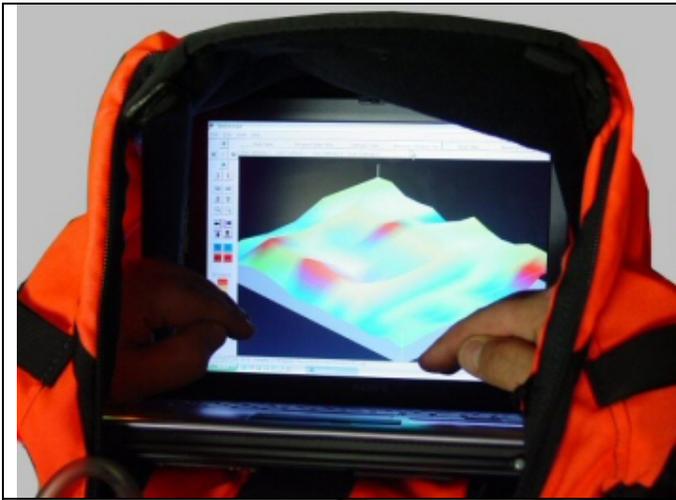

With hands in through sides of front pack computer is easily operated.



Shown with "Off/On" switch in the "On" position.

Section III

Software Introduction

The software has been designed for both the hobbyist as well as the professional. For a better understanding of the software and the functionality that has been built in, the following pages will give a detailed breakdown of all the menu functions and quick control features.

In the development of the software, the goal was to create total functionality that completely frees the user of actually having to set any controls on the unit itself. This way everything is controlled from the software directly rather than having to handle two separate pieces of equipment. Though the functionality of the software is very easy to understand, it is imperative that the proper grid pattern be completed. Ninety percent of the work with the UNDERGROUND SURVEYOR is the proper completion of the grid pattern. Afterwards, the software and target identification are quite simple.

There are many different techniques for taking the actual scan. When the scans are complete, the data must be analyzed to locate the target. We will go over many scans and show examples of anomalies and buried targets that are in our training area. Unit training is available at our test area where we have several buried items. Our training area's design creates a similar many real life conditions for buried targets. 2 Hour training courses are offered by appointment only. Please contact a sales representative for exact details and pricing.

Screen Breakdown

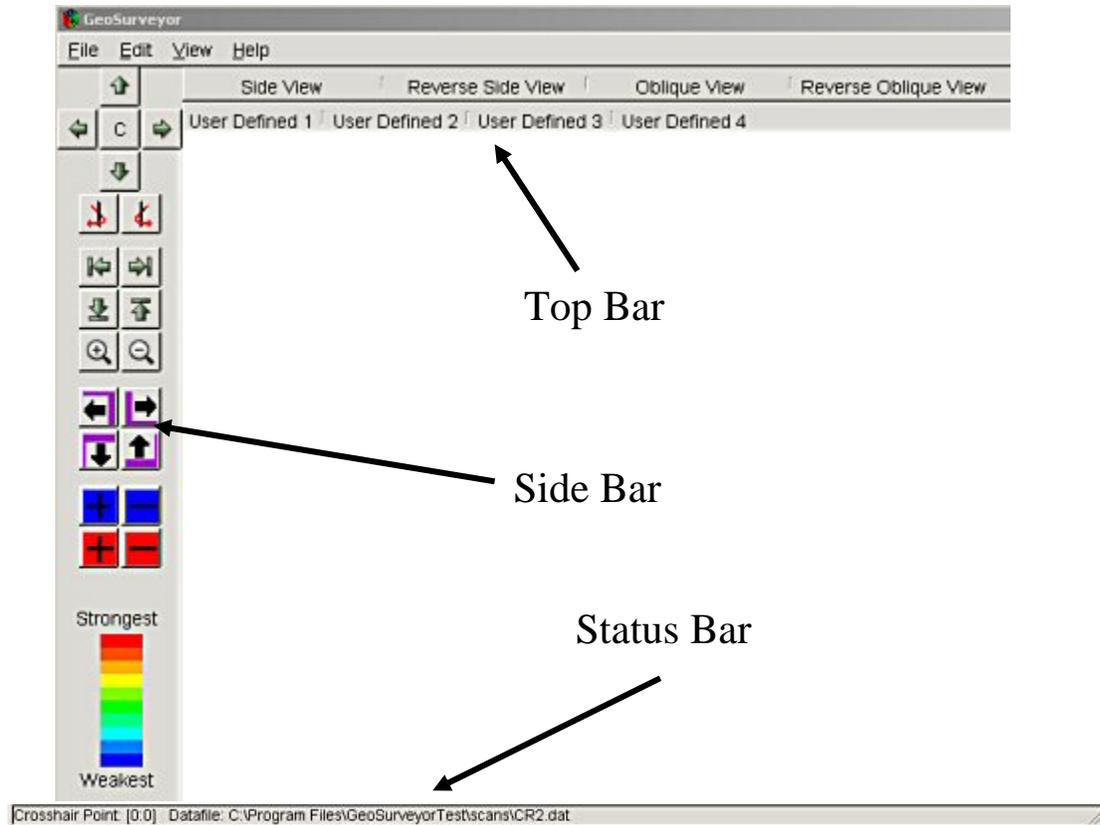


Figure 3.2

In Figure 3.2 is an outline of the screen.

Top Menu Bar

This menu provides full software functionality and quick views.

Side Menu Bar

The Side Bar contains many of the features

Status Bar

In the Status Bar information of the Crosshair Point and the name of the file that is open is displayed at all times

Top Menu Bar

File – This file (Figure 3.3) has the following options and links to the keyboard shortcuts. In here, you can begin a new scan, open a saved scan, save a scan, or save a scan as a different type of file, export a scan, print a scan, or quit the program.

Where you see writing like "Ctrl+N" means a keyboard shortcut. By holding down the control "Ctrl" key and the letter "N" at the same time will start a new scan.

Edit – This menu (Figure 3.4) will allow you to change the values in a given area on a scan. Occasionally there will be an extremely high or low signal. Using the "Copy" and "Paste" functions, you can alter your scan to make it easier to understand.

View – This menu (Figure 3.5) is the most important menu to learn. With this menu, you will be able to set the views necessary to identify the anomalies. You can also see a partial View Menu by Right Clicking on the screen.

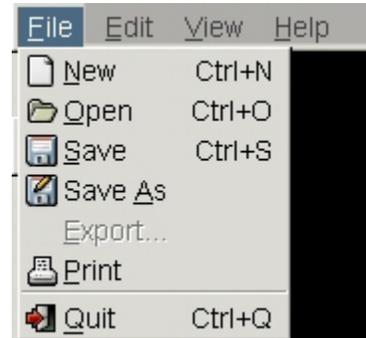


Figure 3.3





Figure 3.4

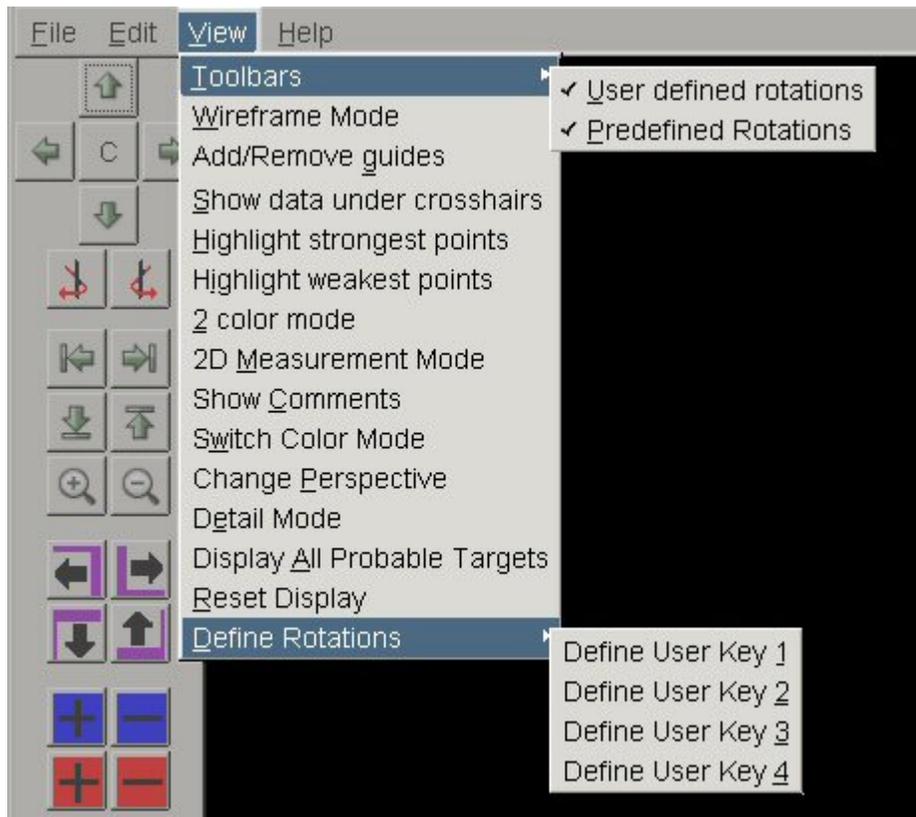

Toolbars – This function sets which toolbars the user wants to see at the top of the menu.

- User Defined Rotations – Shows/Hides the toolbar.
- Pre-Defined Rotations – Shows/Hides the toolbar.

Wireframe Mode – This changes the view from a solid to a wireframe.

Add/Remove Guides – This function will Hide/Show the side and bottom guides that are in a scan. Users when in “Wireframe Mode” commonly remove these.

Show Data Under Crosshairs – This function is done by moving the cross hairs over a desired point and then when selected it will show the following data as in Figure 3.6:

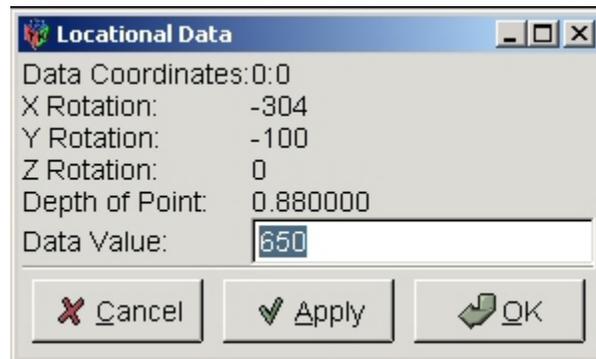


Figure 3.6

- **Data Coordinates** – gives the position of the crosshairs on the screen,
- **X, Y and Z Rotation** – gives the rotation of the scan in degrees of variance from the original position.
- **Depth of Point** – software calculates approximate depth only. Depths will vary in different soil dielectric constants (soil types), i.e. weather, temperature, solar conditions, etc...**Measured in METERS** (approx 3.3 Feet). Example 3.6 shows **.88** or less than 1 meter in depth.
Note: select reset display if your using Change Perspective.
- **Data Value** – gives the data value at the specific coordinate. The value can be changed by using the crosshairs to highlight a point on the image to determine the value. This is how much different from area strength where unit started and ground balanced at start.

Highlight Strongest Points – will show the strongest signal values that were recorded during the scan.

Highlight Weakest Points – will show the weakest signal values that were recorded during the scan.

2 Color Mode – is a preset filter to highlight the strongest recorded signals in a scan with less changes from smaller signals.

2D Measurement Mode – a very useful tool to highlight areas of a scan. Please see details on 2D Measurement Mode on page 40

Show Comments – allows you to view or change comments regarding the scan. Typical comments given are GPS coordinates, markers, distance of survey line, etc...

Change Perspective – changes the view so that all of the upper objects will appear on the bottom and vice versa. This is extremely helpful to identify certain anomalies and areas previously excavated. Also useful in determining approximate depth.

Detail Mode – put the scan into a very fine detail mode. Each point is represented by a single color.

Display All Probable Targets – is a preset filter that uses automatic highlighting of areas that show a significant difference.

Reset Display – changes all setting and returns the scan to all original colors and rotations.

Define Rotations - Enables the user to pre-program views and angles of scans for easier recognition of targets.

- To set the “User Defined Views” first put the scan in the view that you would like have as a preset then click on the “View” button then scroll down the list to “Define Rotations” then click on the desired View to set the view. You can change any of the “User Defined” views by repeating the above procedure.

Help – This menu (Figure 3.7) allows you to view the manual and to see the exact software release as stated in the “About GeoSurveyor” option.

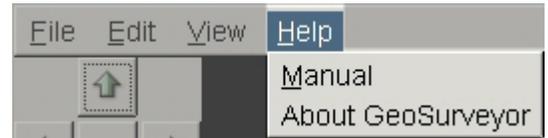


Figure 3.7

Pre-Defined Rotations (Figure 3.8)

- **Side View** – Rotates the scan to a side view.
- **Reverse Side View** – Rotates the scan to the opposite of “Side View”
- **Oblique View** – Rotates the scan to an oblique view.
- **Reverse Oblique View** - Rotates the scan to the opposite of “Oblique View”.
- **End View** – Rotates the scan to an end view.
- **Reverse End View** – Rotates the scan to the opposite of “End View”



Figure 3.8

User Defined 1 -4: Enables the user to pre-program views and angles of scans for easier recognition of targets (Figure 3.8).

To set the “User Defined Views” first put the scan in the view that you would like have as a preset then click on the “View” button then scroll down the list to “Define Rotations” then click on the desired View to set the view. You can change any of the “User Defined” views by repeating the above procedure.

Status Bar


The status bar (Figure 3.2 and Figure 3.9), which is located at the bottom of the screen, shows current Crosshair Point location and also the name and directory of the file that is currently open.

Crosshair Point – This give the exact location in terms of a counter (0:0). The first number of the counter is how many pulses forward from the start point. The second number of the counter is how many survey lines to the right of the start point. The start point is always “0:0”.

Crosshair Point: [0:0] Datafile: C:\Program Files\GeoSurveyor\Testscans\CR2.dat

Figure 3.9


Side Menu Bar



Rotation control buttons.

With these buttons, you can rotate the scan up, down, left and right. The “C” (Center) button will clear all rotation and set the scan back to a top 2-D View.


The two lower buttons rotate the scan on the Z-axis.



Scan Position Button


With these buttons, you can move the entire scan towards the top, bottom, left, or right of the screen.

You can also Zoom In or Zoom Out of your current view.




Cross Hair Buttons

With these buttons, you can move the Cross Hairs to any desired point on the scan.



Color Filter Buttons

With these buttons, you can either increase the amount of red or blue in the scan.



Color Legend

The color legend signifies what the colors on the screen represent in terms of signal strength. Typically, steel, iron and other ferrous metal targets will appear in the reds or yellows. Non-ferrous metal, caves, tunnels, and voids will appear in the light and dark blues. (Note: Windows Vista sometimes blocks this image, but only use for reference colors. See graphic here)

Keyboard Shortcuts

The Keyboard shortcuts were created for the power user who does not want to rely upon the laptop-pointing device. The following shortcuts are performed by pressing the combination of keys either together, shown with the “+” symbol, or consecutively, shown with the “→” symbol.

- **File Tab**
 - Create a **N**ew scan Ctrl + N Alt+F→N
 - **O**pen an existing scan Ctrl + O Alt+F→O
 - **S**ave current scan Ctrl + S Alt+F→S
 - **Q**uit the program Ctrl + Q Alt+F→Q
- **Edit Tab**
 - **C**opy crosshair value Ctrl + C Alt+E→C
 - **P**aste crosshair value Ctrl + V Alt+E→V
- **View Tab**
 - Toolbars (show / hide)
 - User Defined Alt+V→T→U
 - Predefined Alt+V→T→P
 - Wireframe Mode Alt+V→W
 - Add/Remove Guides Alt+V→G
 - Show Data Under Crosshairs Alt+V→S
 - Highlight Strongest Points Alt+V→H
 - Highlight Weakest Point Alt+V→I
 - 2 Color Mode Alt+V→2
 - 2D Measurement Mode Alt+V→M
 - Show Comments Alt+V→C
 - Change Perspective Alt+V→P
 - Detail Mode Alt+V→E
 - Display All Probable Targets Alt+V→A
 - Reset Display Alt+V→R
 - Define Rotations Alt+V→D
 - Define User Key 1 Alt+V→D→1
 - Define User Key 2 Alt+V→D→2
 - Define User Key 3 Alt+V→D→3
 - Define User Key 4 Alt+V→D→4
- **Help Tab**
 - Manual Alt+H→M
 - About Alt+H→A

Analysis of Scanned Data

First here is some general info on the cross hairs and data screen.

You can both determine depth and size using the Geo Surveyor software. After performing a scan, bring up the scan in the software. Using the purple and black arrows (cross hair buttons) on the left move the crosshairs over your target. Right click change perspective (This is very important for depth) and then right click show data under crosshairs. This window has the depth in meters on it as well as the strength or weakness of the target. To determine the size of the target you also use the crosshairs. So depending on the unit you can count the sensors in the scan and determine how many inches wide the object is in the scan. So using a Runabout with a 4 sensor antenna count using the crosshairs over from left to right starting with 1 because the first position gets information. So each 4 sensors over is 20 inches per four sensors. So say the scan is made up of 4 rows and the target completely fills two of the rows we can determine that that the object is 40 inches wide. Now to determine length, we have a person imaging determine how far they can walk in one second. So if that is 2 feet every so every six clicks up using the crosshairs is one second. So say the object covers 6 clicks that would be equal to 2 feet so we now know that the object is 24 inches long and 40 inches wide.

Data value is the strength of the point relative to the ground balance zero point. The relative strength or weakness of a target is important in determining which spot is amplifying the milligauss or dampening the milligauss. Strong or weak values may be important for determining the best place to dig or whether to dig at all, variation in soil mineralization and other important information. Depth of point should not change when the data value is changed but the data value should only be changed to create reminders as it will no longer be correct information.

Analysis of Scanned Data

Analysis of data is by far the most important of all operations with the UNDERGROUND SURVEYOR. Even though properly conducting the grid pattern is 90% of the task, identifying the target is the entire purpose of owning the UNDERGROUND SURVEYOR. Take note of the locations of the scans and properly note your locations to find them again.

Review your data immediately in the field. Very strong or very weak signals (Figure 3.10) should be marked for further scanning. Be sure to re-scan any strong anomalies to see if they are repeatable. The technique “Double X-ing” is critical in the process of pin pointing the location. If an object is suspected to be in a particular location and further scans show that the object is constantly moving, be suspicious of mineralized soil conditions in the area. Real targets do not move, although the shapes that appear on the laptop screen may change.

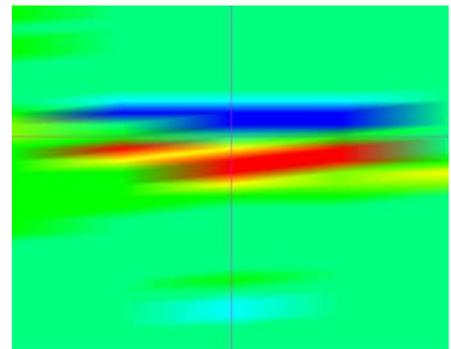


Figure 3.10

(Analysis of Scanned Data Cont.)

When initially reviewing a scan, look for greater changes from the average background color. (i.e. Strong reds or blues with the rest of the scan having a single color.)

Apply some filtering to the scan to enhance masked areas. (Figure 3.11, Figure 3.12, and Figure 3.13). If the targets are larger, look to see if they have a synthetic or manufactured shape. In regards to shapes, imagine the buried item or anomaly. Is it perfectly level? Is it skewed or inverted? The larger the item is and the closer to the surface the target is; the better of an image you will receive. Look for the initial shape of the target. A silhouette like image is shown on the software screen.

When analyzing the data, use the given filters and wireframe mode (Fig 3.13) to view the scan from many different angles and perspectives. In addition to changing colors and wireframe view, rotate the images using either the rotation buttons or the pre-defined view. Unlike looking at an item from the top, a skewed view allows for better interpretation. *Please refer to the "Screen Breakdown" for functionality and description of menus and commands.*

Errors while scanning can be quickly detected by obvious lows on the very first scan point. When viewing a scan and the very first point has the strongest reading, then "null" that difference to better view the rest of the data. *See Section III, "Nulling a high signal"*

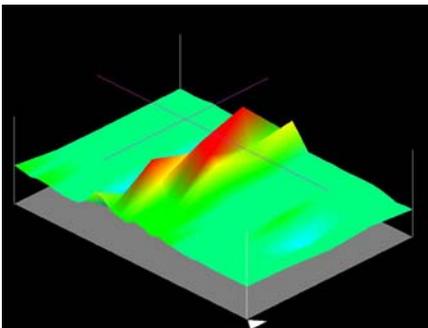


Figure 3.11

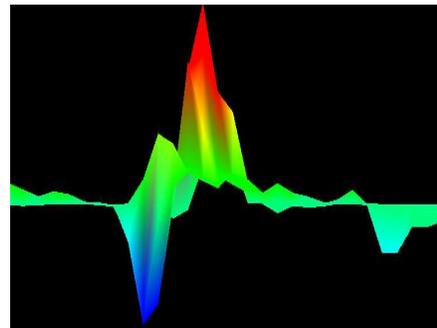


Figure 3.12

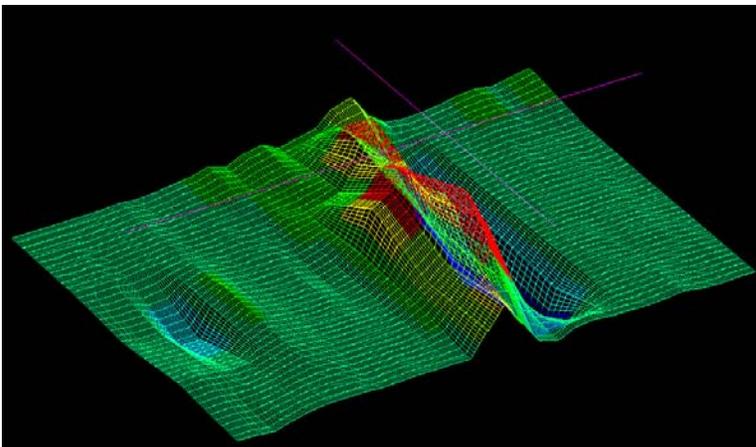


Figure 3.13

(Analysis of Scanned Data Cont.)

An example scan, Figure 3.14, shows that the first scan point is the strongest difference. This can be caused when first starting and not having the sensor in the correct position in reference to the ground. It is important to be ready when clicking on the go button. A helpful tip; have your hand on the mouse or spacebar ready to click and then line yourself up with the first survey line. Try not to look at the screen when clicking. After clicking and starting your grid, look at the screen to be sure that you successfully clicked on the go button and that you are actually receiving data. Another possibility with a scan of this caliber is that the sensors will actually “reverse polarity” based on the ferrous nature of the element that the sensor has come in contact with. In that case the blue void would signify a ferrous objectivity. The red is the common ground.

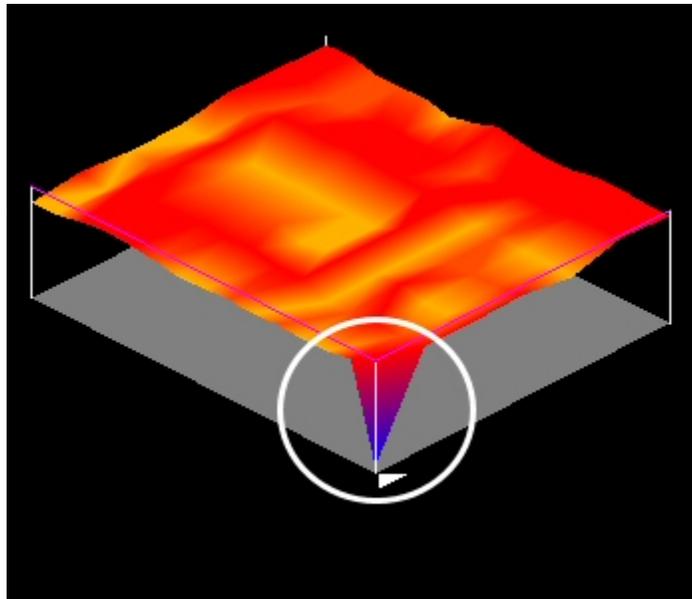


Figure 3.14

2D Measurement Mode

Perhaps one of the most useful tools built into the program is this one. Using the 2D Measurement Mode, you can look at a “Side View” of each individual crosshair. In addition, the rotation functionality is still available in the top right hand corner of the screen.

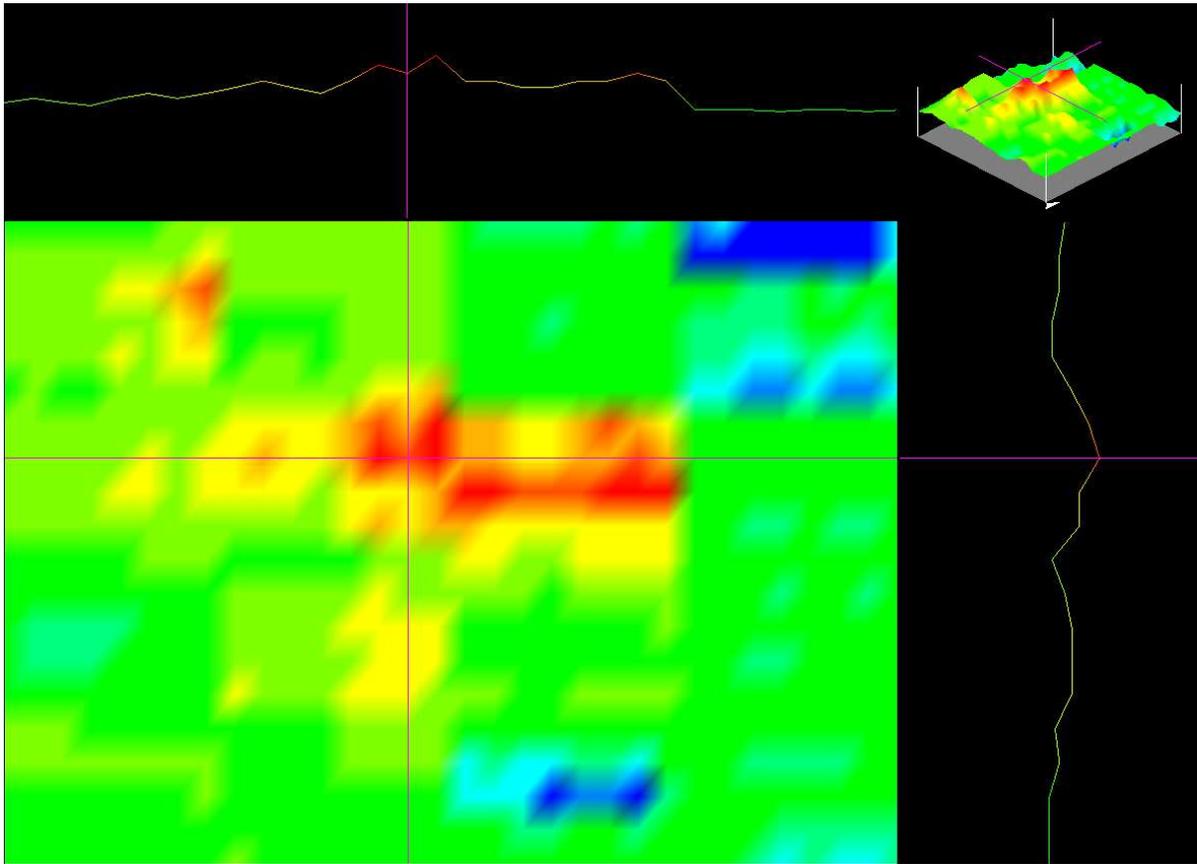


Figure 3.15

In Figure 3.15, there are several parts to the screen. In the top right hand corner there is a small view of the scan that would be seen normally. In the center, bottom left, this is the 2-Dimensional image. This view is from the top looking down. On the top of the screen and the right of the screen is a side view of what is being seen as if you were to look directly down the perspective crosshair.

In Figure 3.16, the view here shows a strong rise with a fast fall. In relation to the overall image, the analysis will show a possible anomaly at this position.

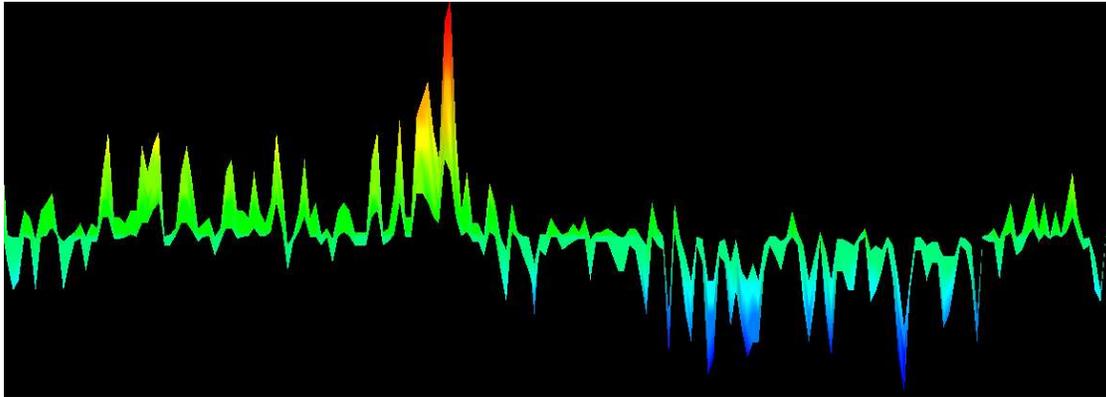


Figure 3.16

As previously mentioned, the main characteristics that we are looking for in the scans are the difference in the signal values. When first scanning an area a rough scan will normally be conducted. The 2D Measurement Mode works very well on both the larger scans and the smaller scans.

When analyzing a larger scan, the differences, for the most part, are not as much as when doing a smaller scan. The 2D mode will highlight stronger points and show more of the background in relationship to those points.

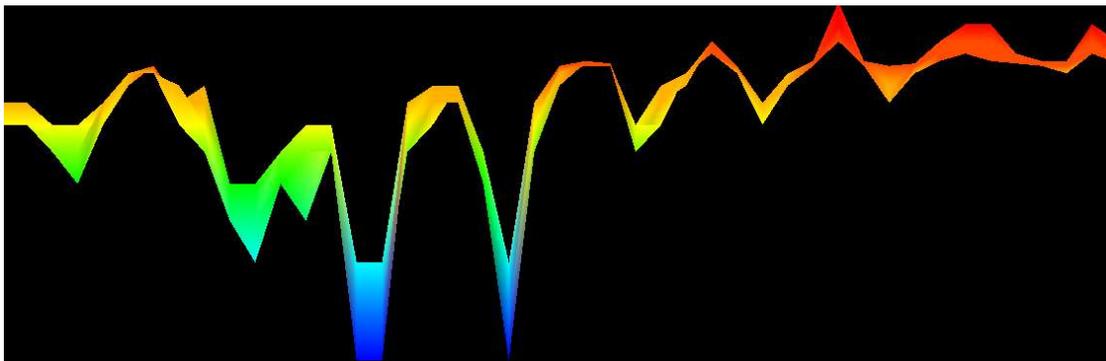


Figure 3.17

In this example, Figure 3.17, of a larger scan, the difference shown here does not clearly stand out by itself when looking at the whole picture. By using this mode, a tunnel or void stands out clearly. The background of the image, Figure 3.17, is the upper portion shown in the red and orange on this particular scan. The larger your background area is on a rough scan the better.

Once an anomaly is detected, it is important to mark that area and perform additional scans to narrow down and pinpoint the location of the target. When making smaller scans around a target, ensure that you are leaving enough room to see the background. A common mistake that tech support sees quite regularly are scans that start in or just before the target. An old saying says, “You cannot see the forest through the trees.” The same applies with analyzing data.

Nulling a High Signal

The process of nulling a signal is quite simple. If the initial scan appears like the one in Figure 3.18, there is a very high signal that is masking most items under it. *Nulling a signal means to change the value of a high or low point on the scan to match the background. Occasionally there are times when a scan point value is far too high or far too low, when this happens then we need to null or remove the signal error.*

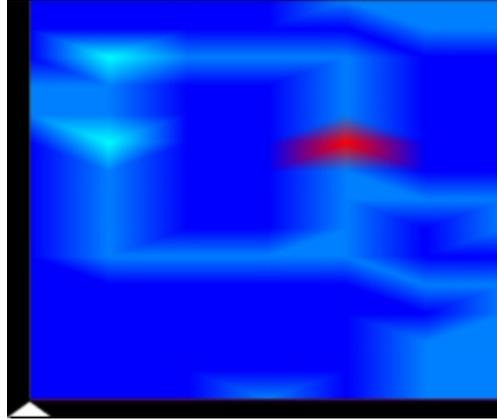


Figure 3.18

- Move the crosshairs by clicking on the crosshair buttons (Figure 3.19).




Figure 3.19

- Position the crosshairs so that they are on point in any direction where potential reading is located on screen from the scan point that you wish to change (Figure 3.20).

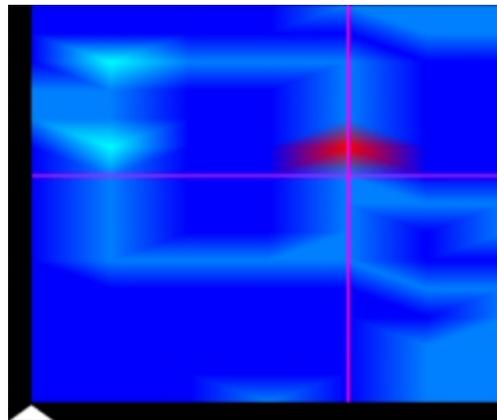


Figure 3.20

(Nulling a High Signal Cont.)

- Hold down the control key (Ctrl) and push on the letter “C”, this is the copy command.
- Move the crosshairs directly over the spot that you wish to change.
- Hold down the “Ctrl” key and push on the letter “V”, this is the paste command. The image should immediately change (Figure 3.21) after the signal has been changed. If more points need to be changed, then repeat the process until all scan points are changed.

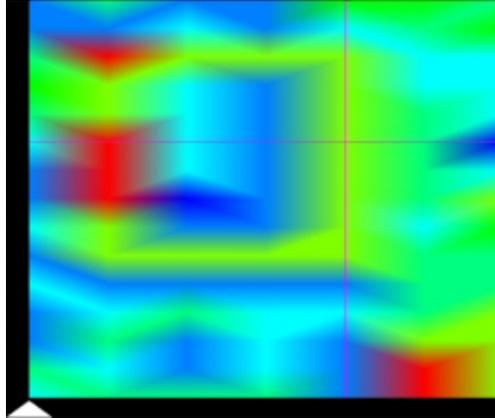


Figure 3.21

Section IV

Unit Operation

The following is a “Quick Start Guide” to getting the unit up and running for the first time. There are two different methods that will be explained here in detail. Please remember the importance of the “Grid Pattern” in order to achieve better data and make analysis easier.

Normal Grid

1. Make sure that batteries are fully charged (not more than 3 hours for the UNDERGROUND SURVEYOR battery—See Section 6) for both the Laptop computer and the UNDERGROUND SURVEYOR.
2. Ensure that the laptop and the control unit are properly in the Front/Backpack.
3. Put pack on over shoulders and secure the side belts so the pack will not slide and so that the pack is balanced.
4. Turn on the power to the SURVEYOR.
5. Turn on the power to the laptop.
6. Once the laptop has started select the “GeoSurveyor” software.
7. After the software is running click on “File” then click on “New”. You can also use the keyboard shortcut by holding down the “Ctrl” and “N” keys.
8. The “New Scan Setup Wizard” will appear, click on the “Next” button.
9. In the next dialog box are your options, select the amount of time, in seconds, that it will take you to cover one survey line (Figure 4.1a). You can either click on the up and down arrows located next to the actual second count. For instance five seconds, or you can click on the “More” or “Less” buttons on the right hand side of the dialog box. Next you can select the DISCOVERY’s option of “Live Mode” to view data in real time mode by clicking on the “Live Mode” button.
10. After selecting the amount of time, click on the “Next” button. Be sure to have your antenna oriented and on the ground ready to detect.
11. The next dialog box (Figure 4.2) is for comments about the scan that is going to be taken. Comments that are typically entered include weather, soil condition, adverse terrain, location of scan, etc... Once completed with the comments, which of course, can be entered after completing the scan as well, click on the “Next” button.
12. A small dialog box will open in the top left hand corner waiting to establish a connection. At this time the sensors will “Ground Balance” allowing a more “easy to read” evaluation of the scanned data for target identification. Once the connection is established, you will be able to click the “Go/Pause” button or the “Quit” button.
13. Before you click on the “Go” button, align yourself with the desired path of the survey line. Set the mouse over the “Go” button and be prepared to click it. Click on the “Go” button and immediately begin your survey line.
14. The timer will automatically stop after the preset amount of time. Turn around and align yourself with the second survey line. Be sure that after you turn your body to start the second survey line that you turn the sensor 180° so that it is facing exactly the same way it was in the first survey line. For a more detailed instruction about the “Grid Pattern”, please see the section called “Grid Pattern”. Follow the same routine as in #13.
15. When scanning whatever direction you are traveling (S/N/E/W) etc. always keep the side of the sensor marked “N” facing North.
16. When completed click on the “Quit” button, and save data.

Important Note:

Make sure to have your antenna on the ground and pointed in the direction of the row when you are at the Comments screen do not pick the antenna up until it says connection established

"Quick Start" Normal Scan Setup visual

Figure 4.1a



Figure 4.1

Figure 4.1b



Figure 4.2



Important Note: Make sure to have your antenna on the ground and pointed in the direction of the row when you are at the Comments screen do not pick the antenna up until it says connection established

"Quick Start" Tunnel Scan Setup visual

When conducting a scan for tunnels, please remember to follow the analysis description for tunnels in this section called "Tunnel and Void Locating".

1. Make sure that batteries are fully charged for both the Laptop computer and the UNDERGROUND SURVEYOR.
2. Ensure that the laptop and the control unit are properly in the Front/Backpack.
3. Put pack on over shoulders and secure the side belts so the pack will not slide. The pack is secured so the operator will not have a shift in weight causing the operator to lose balance and fall.
4. Turn on the power to the UNDERGROUND SURVEYOR.
5. Turn on the power to the laptop.
6. Once the laptop has started, select the "GeoSurveyor" software.
7. After the software is running click on "File" then click on "New". You can also use the keyboard shortcut by holding down the "Ctrl" and "N" keys.
8. The "New Scan Setup Wizard" will appear, click on the "Next" button.
9. In the next dialog box are your options, select the amount of time, in seconds, that it will take you to cover one survey line (Figure 4.1a). You can either click on the up and down arrows located next to the actual second count, or you can click on the "More" or "Less" buttons on the right hand side of the dialog box. Select a higher amount of seconds because you will only do one (1) survey line. Next you can select the DISCOVERY's option of "Live Mode" to view data in real time mode by clicking on the "Live Mode" button.
10. After selecting the amount of time, click on the "Next" button.
11. The next dialog box (Figure4.2) is for comments about the scan that is going to be taken. Comments that are typically entered include weather, soil condition, adverse terrain, location of scan, etc... Once completed with the comments, which of course, can be entered after completing the scan as well, click on the "Next" button.
12. A small dialog box will open in the top left hand corner waiting to establish a connection. Once the connection is established, you can click on the "Go/Pause" button or the "Quit" button.
13. Before you click on the "Go" button, align yourself with the desired path of the survey line. Set the mouse over the "Go" button and be prepared to click it. Click on the "Go" button and immediately begin your survey line.
14. The timer will automatically stop after the preset amount of time.
15. When completed with the only survey line click on the "Quit" button.
16. See "Tunnel & Void Locating" for viewing of scan. (Figure 4.6)

Grid Pattern

Let us create a Grid, in this example (Figure 4.3) we will go 14 second long reading on the survey line by 6 Survey lines wide. The grid pattern would look like the one below.

Typical scans are a minimum of four or more survey lines. The larger your scan, the more background will be available to find your target. The length in between the pulses is only relevant to the previous reading. For example, if the distance between the first and second reading was 4 ft. (100cm) then each reading, including the turn should be 4 ft. (100cm) away from one another, this scan is commonly referred to as a rough scan. If the distance between the first and second reading was next to the last row, then this scan is typically referred to as a Fine Scan. ***Tip** Raise sensor at least 1 Foot from ground to find larger targets faster with minimum filtering. The **SENSOR MUST ALWAYS FACE THE SAME DIRECTION,** unless in “Live Mode” In that case, you must pause the sensors from receiving data in order to change directions in “Live Mode” by pressing the space bar or the left mouse button the arrow on “pause”. Continue by clicking “go” or by pressing the spacebar once more to continue scanning in “Live Mode” Each time you complete this action, the sensors will once again “Ground Balance” This is relevant if it is going up a survey line or down a survey line. (See Figure 4.3a) Rotating the sensor itself will cause erroneous readings and the data collected will most likely be unusable.

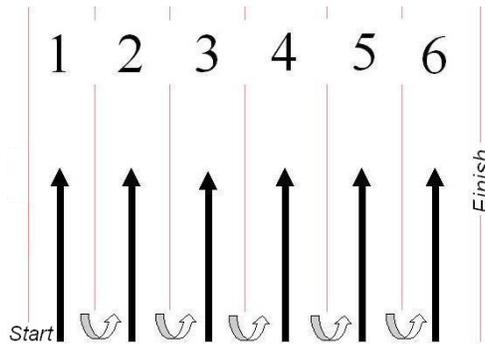


Figure 4.3



Figure 4.3a

A typically scanned area would be like the image above. Always moving to the Right of the first survey line and working in the same direction to the last survey line. In addition, since this is an Electromagnetic instrument it is very important to know where magnetic North is. It is best to bring a compass to set magnetic declination for your area. In the Northern Hemisphere, it is always best to start from the South, go towards the North on the first survey line, in the Southern Hemisphere start from the North, and go towards the South. Although scans in the East/West direction also work, just not as well as the North/South directional scans. Remember that a fine scan and a rough scan are performed using the same Grid Pattern. Any variance from the grid pattern will result in an inaccurate reading, most likely producing erroneous results and leading to extra work in the field. If an object, like a tree, is blocking a survey line then shorten your grid to accommodate for the tree. In the event that you need to walk around a tree, “Live Mode” is a great approach to the target identification.

Importance of the Grid Pattern

The grid performed is ninety percent of the work. If your grid does not align correctly then the scan that appears on the laptop may not be correct. An example of the grid pattern importance is shown below.

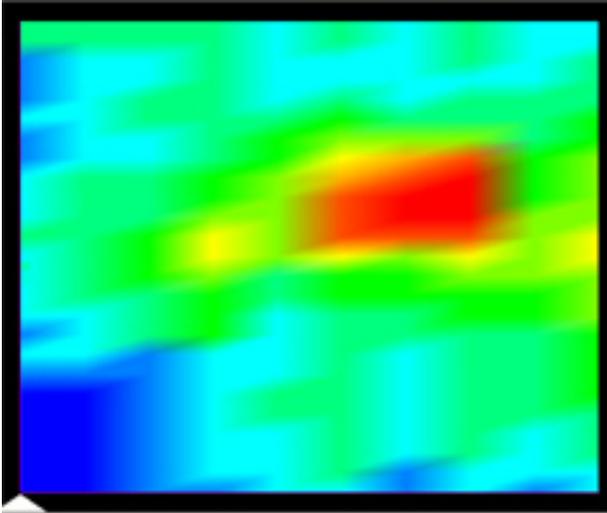


Figure 4.4

In the example to the left (Figure 4.4) is a filtered view of an actual target.

When the grid pattern *is* properly conducted, the image will show a definite man made anomaly very clearly.

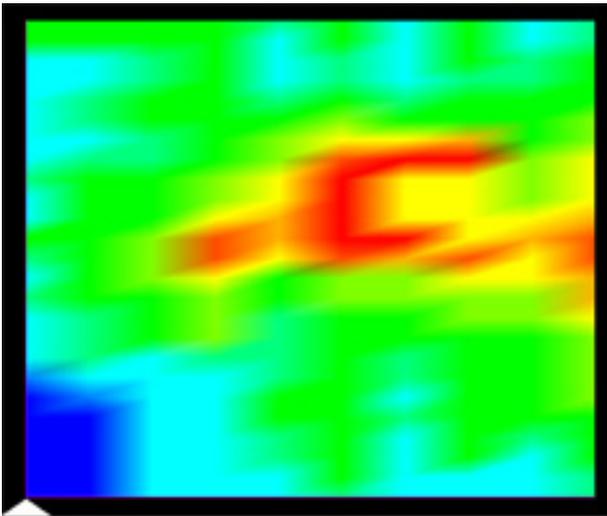


Figure 4.5

In the example to the left (Figure 4.5) is a filtered view of an actual target.

When the grid pattern *is NOT* properly conducted the target is not so easily identified. The image that you see to the left is common of mineralization, which can be quickly overlooked.

In the two examples above, one can clearly see the difference. When training with the unit, it is always helpful that a second person watch the operator to ensure that the unit not be rotated at the end of the turn and that the operator is walking a straight line. The operators pace determine the distance of each scan and time set in the software.

Tunnel & Void Locating

Being able to locate tunnels, voids, caverns, sinkholes, etc... is a major function of the UNDERGROUND SURVEYOR. Using EM technology the UNDERGROUND SURVEYOR Sensor Array is able to pick up the signals emitted by a void or tunnel. The following is the proper procedure for locating a tunnel.

The grid pattern does change when looking for tunnels or voids. Instead of the pattern going forward and to the right, all you do is one straight line without turning the instrument at all. When doing the line please be sure that there is enough area on both sides of the suspected tunnel to get enough of the background area in so that the tunnel will stand out clearly. This technique can also be used to locate other anomalies but is best used for tunnels or larger voids in the earth below you.

When you begin with your setup, please be sure that you have enough room within the time allotted on the software to travel the desired distance. If there is too much time then you can "Pause" the scan and then stop the scan by clicking on the "Quit" button.

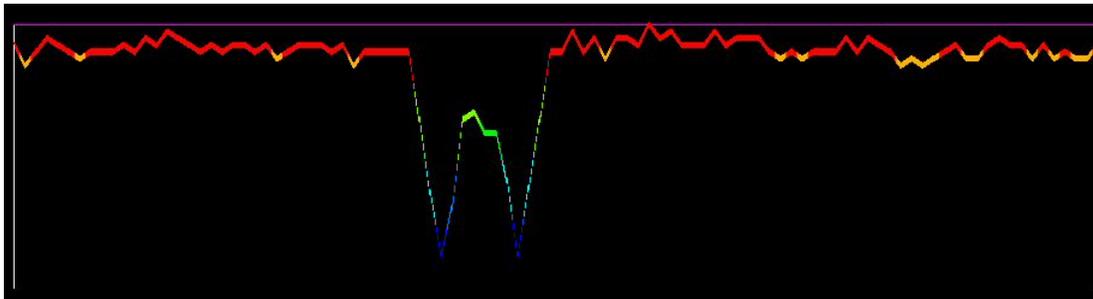


Figure 4.6

In the above image (Figure 4.6), there is an example of how a tunnel may appear. As you can see, there is enough background on either side of the void to allow it to stand out better.

Here are the exact procedures for obtaining this image.

1. After stopping scan your screen should only have a single line.
2. Click on the "Side View" button on the top menu bar. Now you should see that same line but sideways. (Figure 4.7)



Figure 4.7

3. By clicking only one time on the rotate buttons (Figure 4.8), the view will change from a direct view to a slightly off-center view, which will enable you to see the tunnel.




Figure 4.8

4. The final view will allow you to see where the tunnel begins and where it ends.
5. In Figure 4.9, all of the points of this type of tunnel are explained.
 1. Beginning of the tunnel.
 2. First lowest signal generated by the tunnel.
 3. Peak in the center of the tunnel. (This typically represents the highest point on the inside of the tunnel.)
 4. Last lowest signal generated by the tunnel.
 5. End of the tunnel.


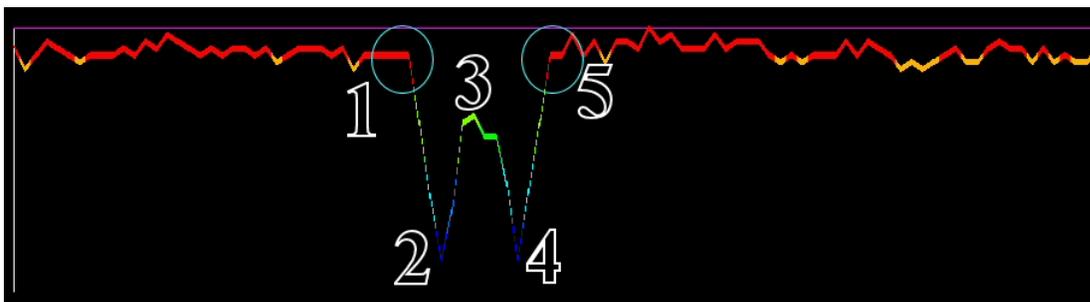


Figure 4.9

To verify that it is a tunnel, do the scan multiple times perpendicular to the tunnels paths. Most tunnels are fairly long and will produce a semi-constant signal over a larger distance. In the event that a tunnel ends abruptly and you can narrow down both sides of it, it will most likely be a void or sinkhole under the surface.

Searching an Area

When searching an area, the first thought is always to do the whole area in one shot. We recommend breaking up the area into smaller pieces if it is a large area (Figure 4.10). For example if the area to be searched is the size of a football field, we suggest cutting it up into several sections so that your scans can be more accurate with less chance of error. The search pattern is very easy to do and as mentioned previously, 90% of the work is performing a proper grid.

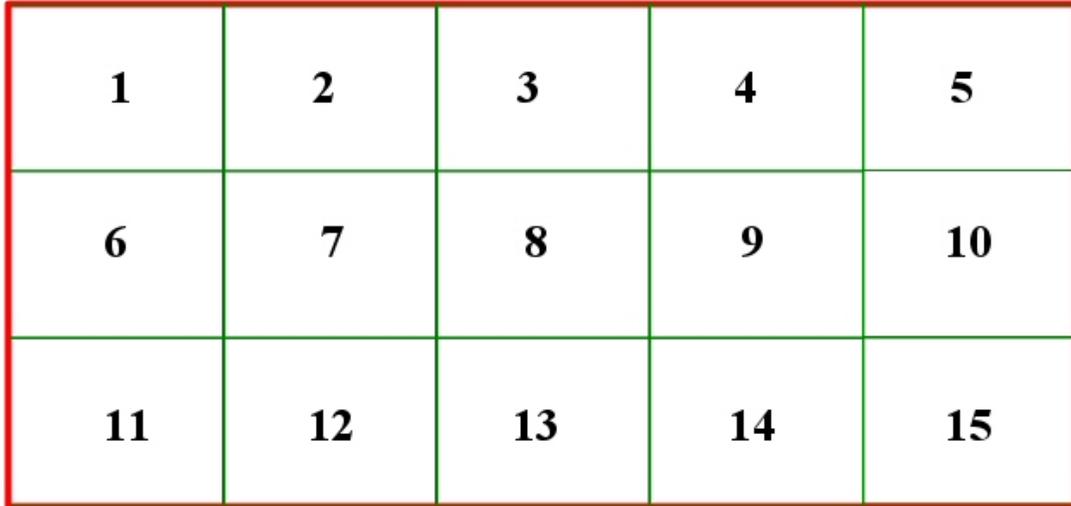

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15

Figure 4.10

Suppose in the drawing above that the area in the red is the total area to search. In this example, we will say that the width of the field is 50 yards or 50m and the length is 100 yards or 100m. By breaking up the scans into smaller sections, like the area in the green, you can search much quicker with better data. Be sure to mark off the areas already searched and to enter the data into the comments in the scan itself. Also, make note on the fields so in the event that you find an object in section 4 you will be able to return directly to section 4 rather than having to repeat the entire process again.

Double-X-ing your Target

One of the most commonly asked questions is, “How do I know I’m looking at a real target?”

We call this procedure “Double X-ing”. This routine is extremely important, especially with Electromagnetic devices that can see deeper than most detectors.

Figure 4.11 is a typical visual example of a found cache.

The more times that you cross over a target at different angles and times of day will help in validating a good target (Figure 4.12).

Temperature, radio frequency transmitters, solar energy, ground mineralization, clay, salt water, etc. can interfere and cause erroneous conclusions.

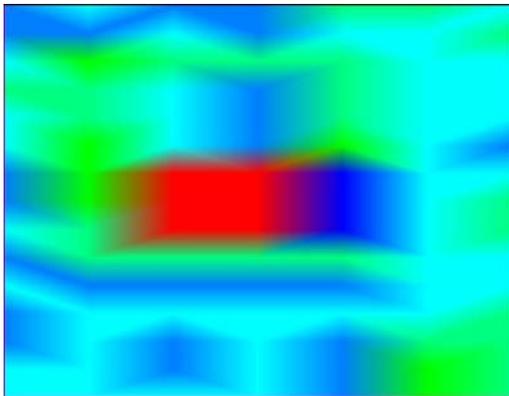


Figure 4.11

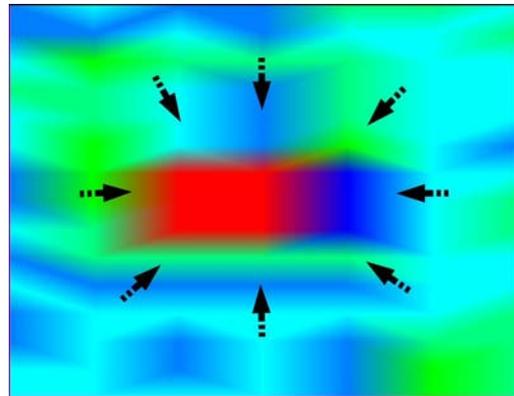


Figure 4.12

Before you mark your location for excavation be sure to go over every target at least 4 times but it is recommend 6 or more times to be sure that you end up with the same or similar image over the location.

The finer the scan, the horizontal and vertical position of the antenna, automatic or manual modes are all contributing factors as to what image will appear on your screen. For finer scans, we recommend to lay out a grid (string or chalk lines) and scanning the suspect location several times in manual mode.

If the target moves from one area to another, it may not be a real target. When targets move, it typically is mineralization. Mineralization often fools the software. Using the “Double-X-ing” technique you can rule out what is and what is not real.


Targets may vary; attempt to isolate the cache to its closest points prior to considering excavation. Remember to fill in all holes after recovery.

Tip: In Northern Hemisphere South East to North West Scans Display Best.


Determining Approximate Depth Point

First, here is some general info on the cross hairs and data screen.

You can both determine depth estimate and size using the Geo Surveyor software. After performing a scan, bring up the scan in the software. Using the purple and black arrows on the left move the crosshairs over your target.

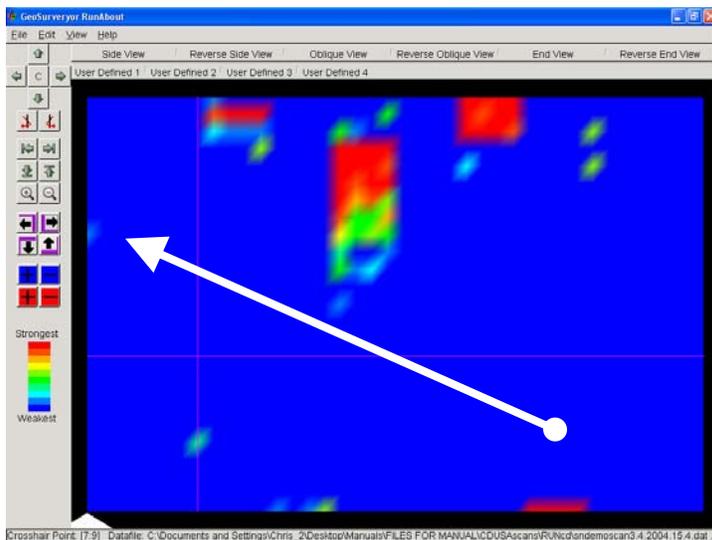


Right click "*Change perspective*" (This is very important for best depth indication). Also can select from top menu "*View*", and then "*Change Perspective*".

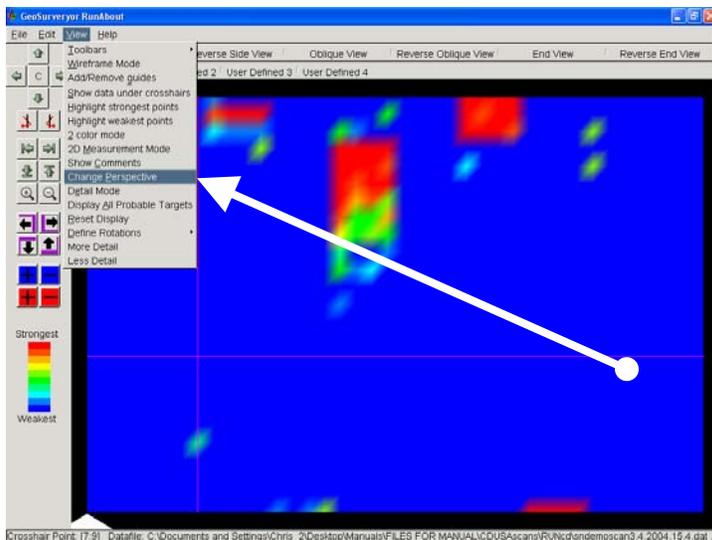


(Determining Approximate Depth of Point cont.)

And then right click show data under crosshairs.

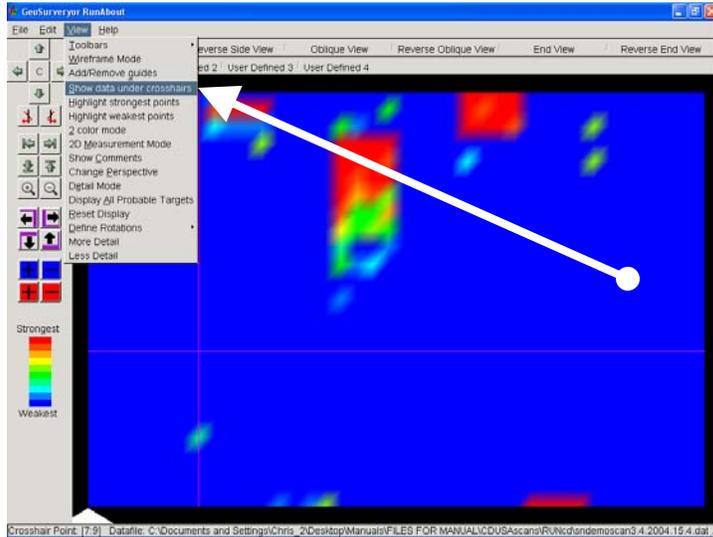


This brings up a window that has the depth in **METERS** on it as well as the strength or weakness of the target *"*Data Value*". Numbers before Decimal point are *less than* 1 meter (3.3 Feet). Example: 0.88 under "Depth of Point" is *less than* 1 whole meter.

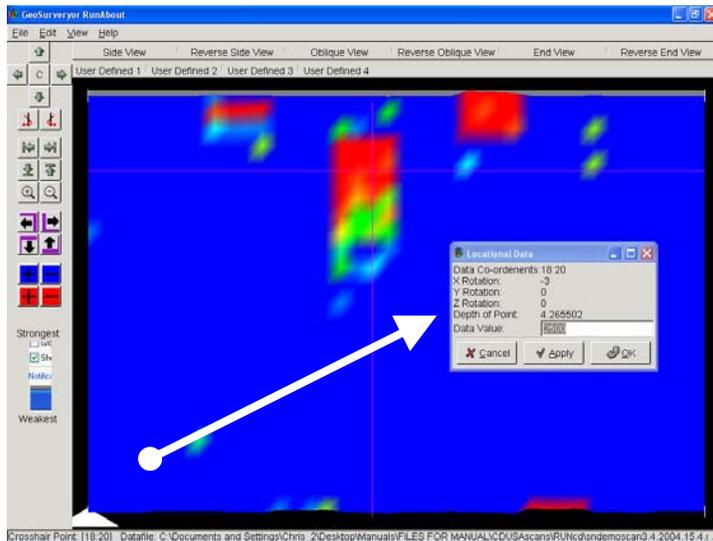


**Data value* is the strength of the point relative to the ground balance zero point. The relative strength or weakness of a target is important in determining which spot is amplifying the milligauss or dampening the milligauss. Strong or weak values may be important for determining the best place to dig or whether to dig at all, variation in soil mineralization and other important information.

To determine the size of the target, you also use the crosshairs. So depending on the unit, you can count the sensors in the scan and determine how many inches wide the object is in the scan. *Example*, using a Runabout with a 4 sensor, antenna count using the crosshairs over from left to right starting with 1 because the first position gets information (each sensor gets 1 count). So each 4 sensors over is 20 inches per four sensors (when using a 20" antenna). So say the scan is made up of 4 rows and the target completely fills two of the rows we can determine that that the object is 40 inches wide.

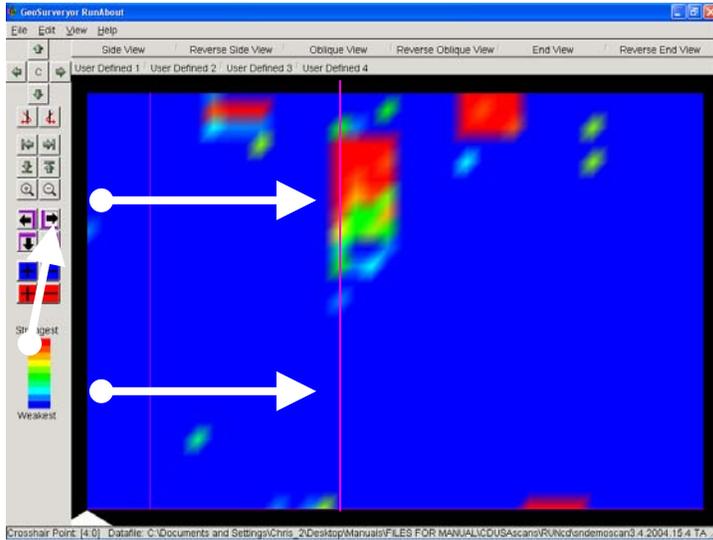

Now to determine length, we have a person imaging determine how far they can walk in one second. So, if that is 2 feet every so every six clicks up using the crosshairs is one second traveled forward. So say the object covers 6 clicks that would be equal to 2 feet so we now know that the object is 24 inches long and 40 inches wide.

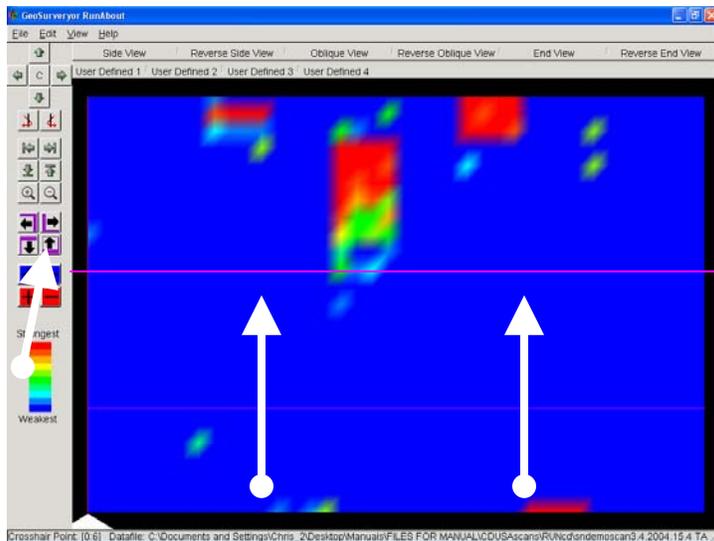


Section V


Examples

The following examples are a collection of actual targets, from both our dedicated training facility and scans taken in the field.

This is an example of a 55-gallon drum that is buried at our test facility in Oregon. The background is mainly green and yellow while the target (barrel) shows as a red.

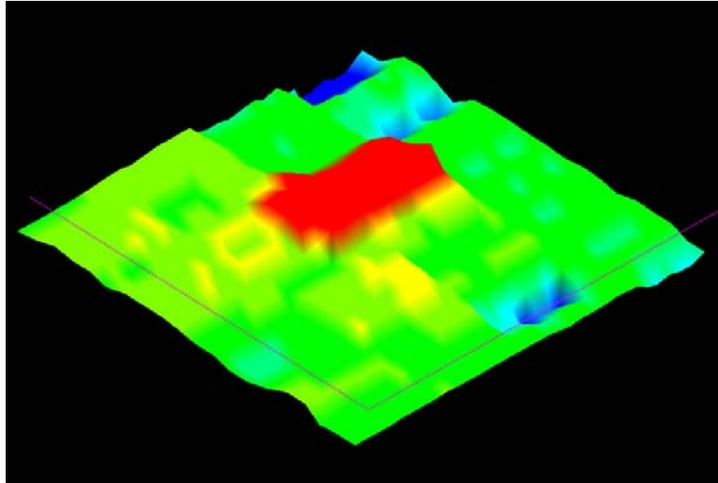


This is the same barrel as above and is on a lot smaller grid size. The one above was a very large grid (rough grid); the one below is a fine grid of the same barrel.

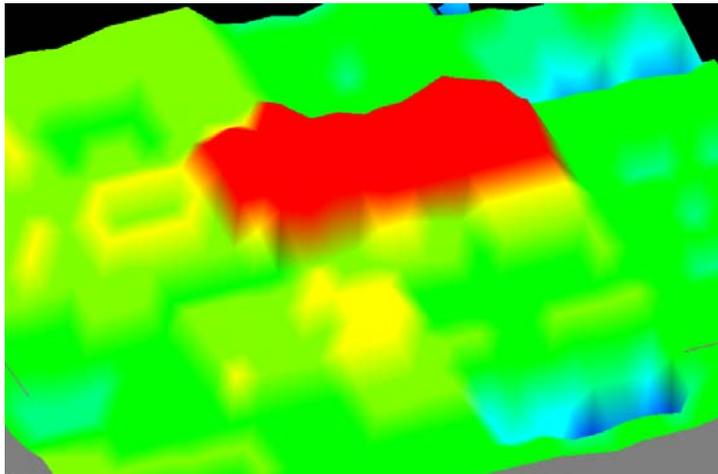


(Examples Cont.)


This is an example scan of clear soil. The soil in this scan is free of any anomalies or surface mineralization.

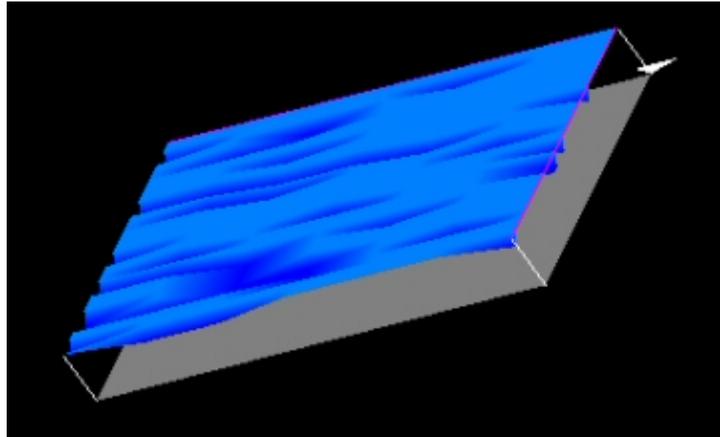

This scan has three targets. All of the targets are buried under 6 inches of concrete. They are shown as the blue from the dug holes in the center of the scan, and Red for the metal content with strong reading. The first and third targets are ferrous metal and the middle target is non-ferrous.

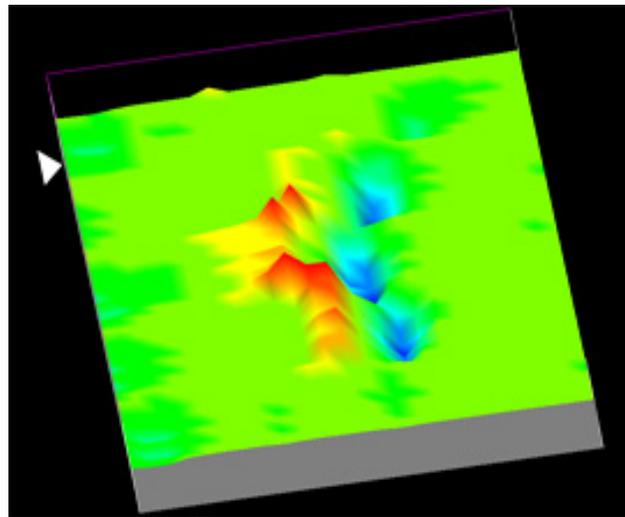


This tunnel scan shows the location of two tunnels, both circled. When looking for tunnels, it is important to see both the down side and the up side. Be sure that there is enough background to see the differences of the tunnels.

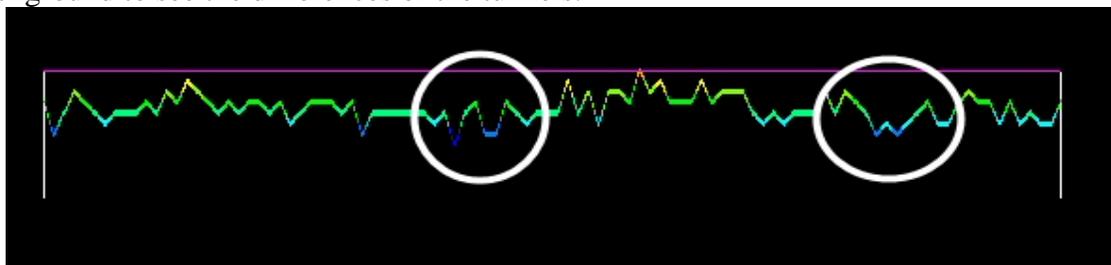


(Examples Cont.)


This is the “End View” of a scan that is showing an error. The error occurred by rotating the sensor at the end of every scan. In order to correct this error, do not rotate the unit.

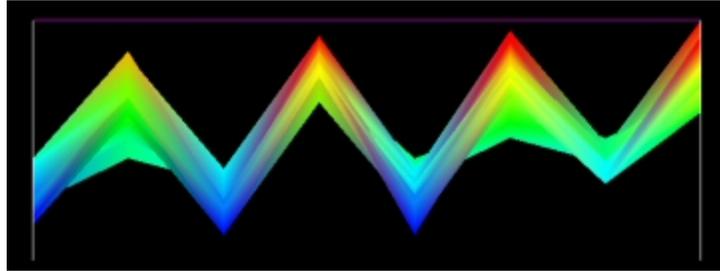

This is a top view of the same type of error that is caused by rotating the sensor at the end of each survey line. The exception to this error is that you can still see the targets in the ground. The targets in this scan appear as a red color.

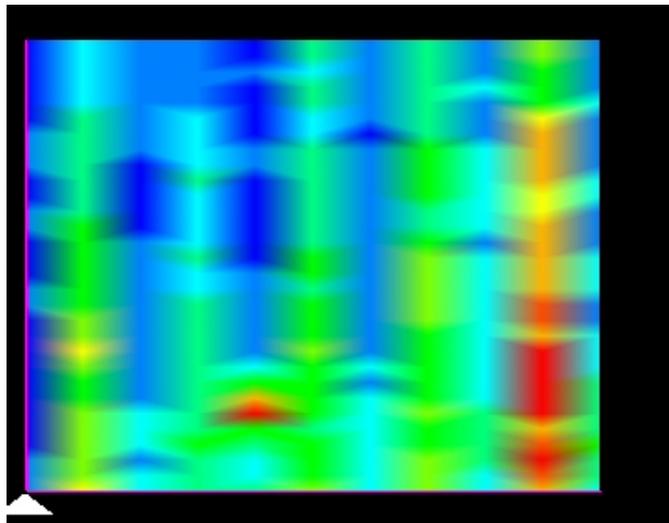

This is the end view to the image directly above. Although it has an error, you can still see the large difference, the blue point down, showing that there is an anomaly.

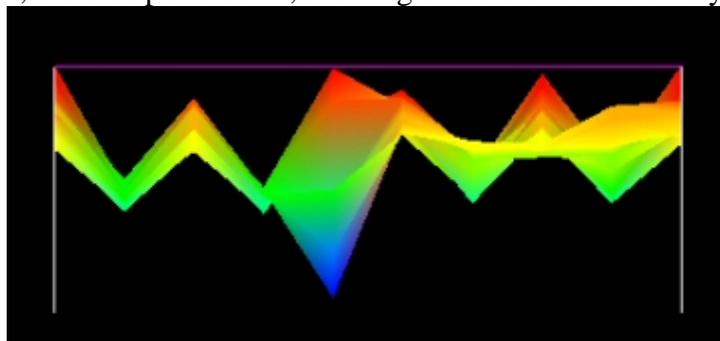

Geo Pinpointer

Quick-Start Easy Use Card

1. Turn on control unit power
2. Start laptop computer and start software
3. Make sure antenna and network cables are plugged in
4. Allow a few moments for programs to communicate with one another
5. When ready push Connect then Start to begin scanning
6. Keep antenna pointing down without turning, in the same direction (for best results)
7. In the Southern Hemisphere, south to north scans will provide best results.

Current Reading - Very useful for finding location of interest.

HIGH/LOW reading to distinguish between targets and target approximation

Change Defaults (as needed) example: For weaker targets set the high/low value to 10/-10 or 5/-5 for even weaker anomalies.


Scans Per Second - Number of readings per second may be increased for fast traveling.

Default - Resets values back to their preset levels.

Disable/Enable Sound - Turns on/off high/low strength sound beep.

Status Bar - Shows Connectivity to control unit. Wait for ready before hitting start.

Ground Balance - Shows auto-changing Balancing of low to high ground mineral conditions

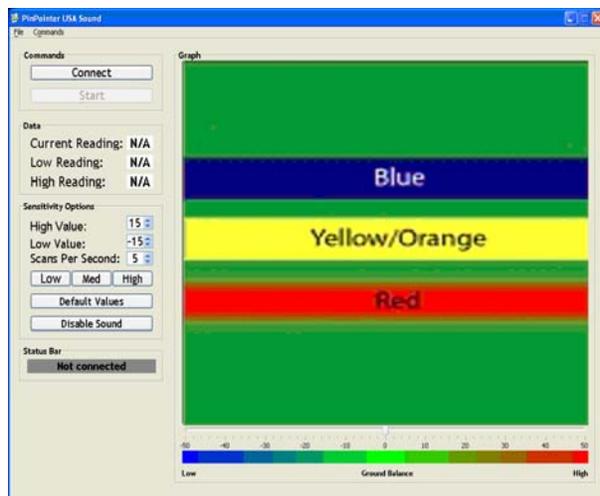

-  Green- Background(common ground)
-  Blue - Negative Target(void, cave, tunnel)
-  Yellow/Orange - Medium Target
-  Red - Strong Target

- Pause often (Ground Balancing) every 1 or 2 minutes to reset to zero and clear past readings.
- For Depth Estimation, mark the ground over target (largest number) then walk away from target until you get “0” reading. Then measure distance to target, that distance will be approximate depth. Repeat several times at different angles of approach to affirm depth estimation.
- At time of pinpointing exact spot of interest, mark on ground for reference.

Ground Balancing and Scan Method


USA Geo Pinpointer

When detecting hollow objects or objects with disturbed ground you can read both negative and positive numbers as it can detect the metal or the void, also the direction (north, south) the antenna is facing can influence the numbers. The indicating numbers may not be large, it is the difference in numbers that is the indicator. The monitor will "most likely" show red when detecting a metallic object and blue will be a void (or negative milligauss reading) when the values are set correctly. (all dependant on ground minerals)

When a target is located mark the ground and approach the target area from different angles and try to repeat the scan results to confirm target location (this will assist in depth of target equation also). Gold, Silver and other non-ferrous metals shield the milligauss from the sensor, large caches of gold or silver may show as negative or blue reading.


- Pause and without turning the antenna (clockwise or counter clockwise) set PC at "0" over ground that is known not to have a target (referred to as ground balancing). You can repeat the Ground Balancing during scan to clear past high and low readings (but ground balancing starts over).
- Mark a starting point on the ground far enough from the suspected target to have sufficient background readings and proceed in a straight line toward desired point (past target area). It's recommended laying out a grid marked on the ground for an organized accurate scan (with a GPS it can be laid out on it).
- To continue a gridded scan return to the beginning point and move to the right of that point (about 2 ft. or less increments) and repeat the scan once again.
- Repeat this technique as many times as desired. If possible scan south to north for best result, but any direction works well, forward, backwards, left or right.
- Please don't turn antenna clockwise or counter clockwise, because it is sensitive to magnetic north. The data is captured in live mode is real-time, showing what you are scanning currently and is not in the memory of the PC.
- Antenna is always best to be pointed in the same direction, horizontal and as close to the ground as possible.

Scan Method and Samples

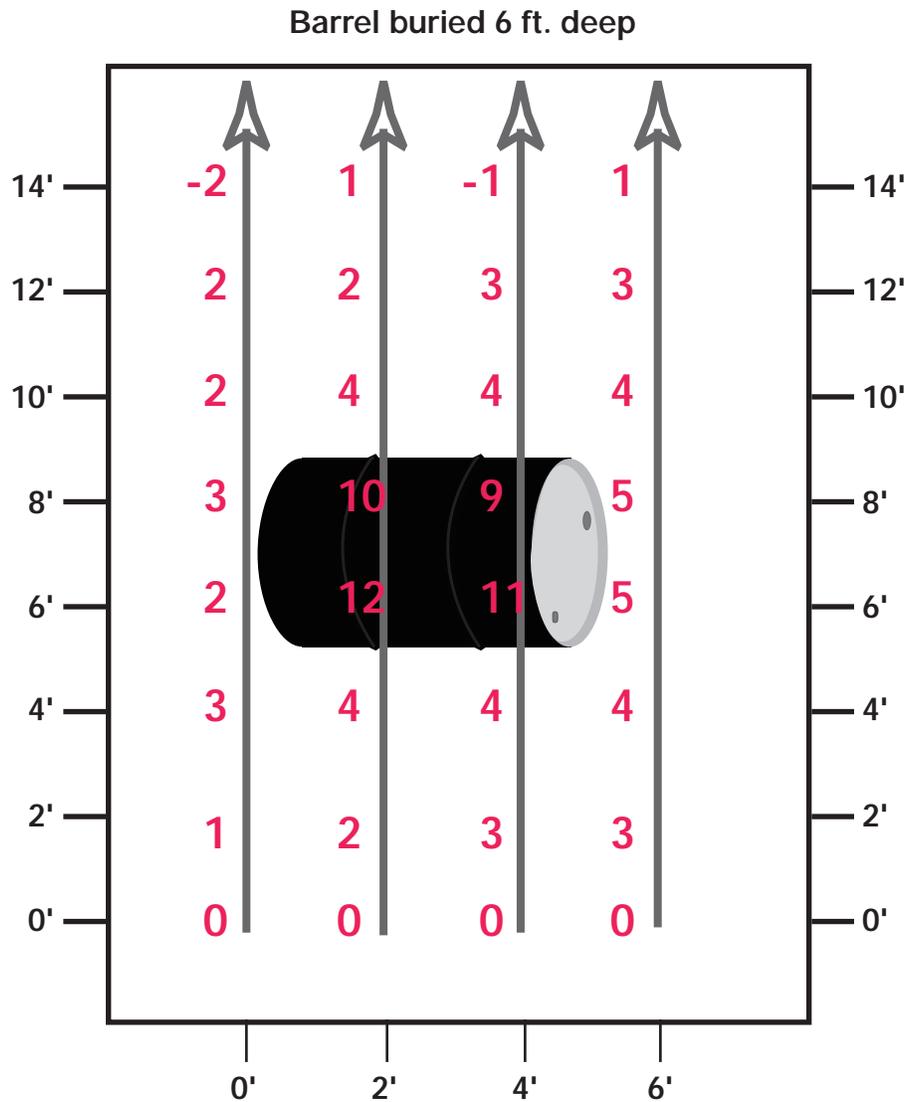


For depth estimation mark the ground over target (largest Number) then walk away from target until you get "0" reading. Then measure distance to target, that distance will be approximate depth. Repeat several times at different angles of approach to affirm depth estimation.

Scans Performed in the Dry Desert Climate at Walking Speed*
 *wet climates will increase readings

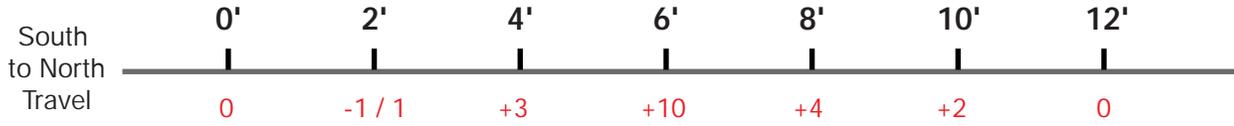

Tire Rim Buried 6 ft. Deep

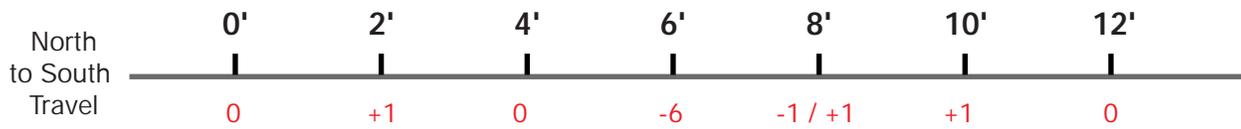

PVC Buried 2 ft. Deep





Note: can read +15 if depends on orientation of the object (pointing north or south)





Rebar 3 in. deep in concrete

Scans Performed in the Dry Desert Climate at Walking Speed*
 *wet climates will increase readings

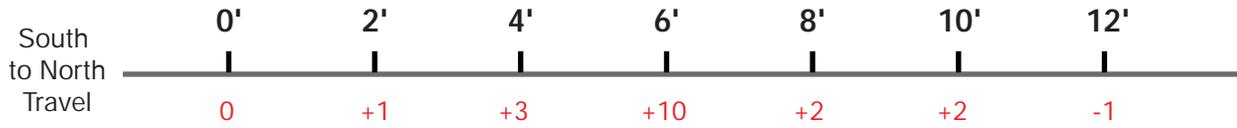

Copper, Aluminum and Other Metals Buried 5 ft. Deep

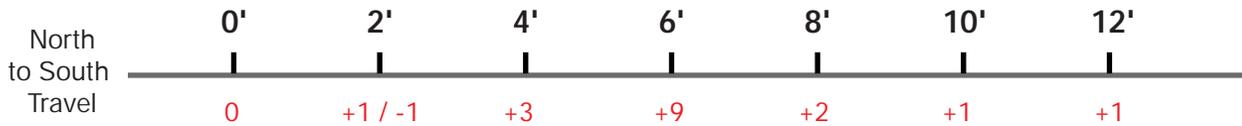


Copper, Aluminum and Other Metals Buried 5 ft. Deep



Hammer Head Buried below concrete floor

Scans Performed in the Dry Desert Climate at Walking Speed*
*wet climates will increase readings

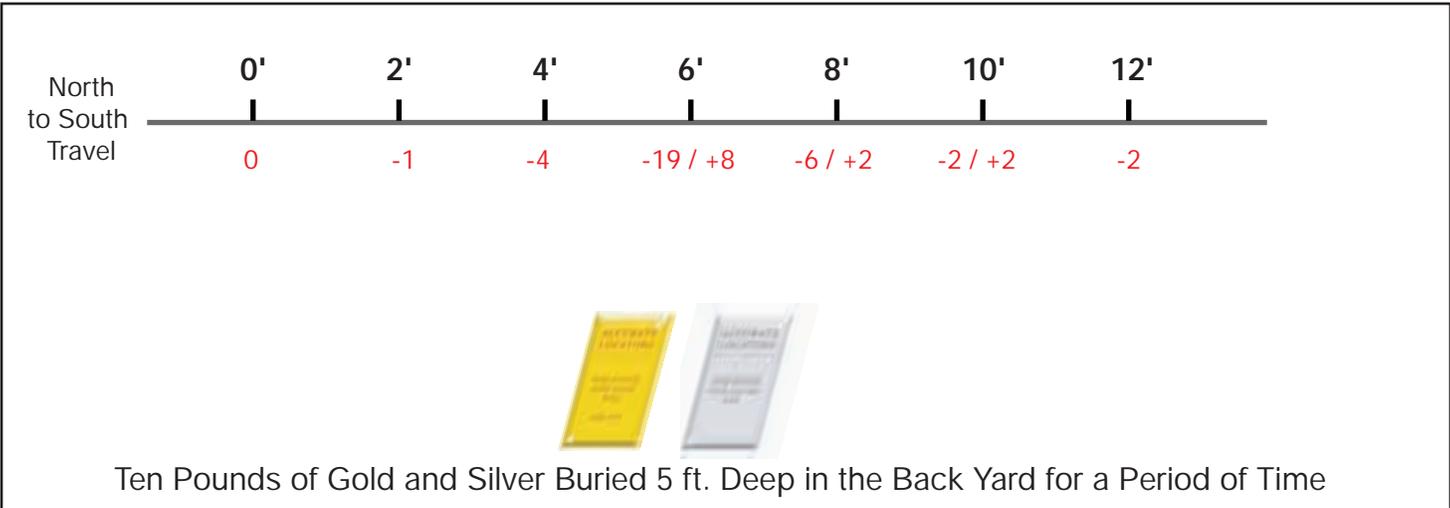

Common Errors

Here is a list of some common problems that can be easily overlooked.


- **Overcharge battery**



- **Leave battery connection attached when putting field pack in case**



- **Leave unit on when changing antennas**

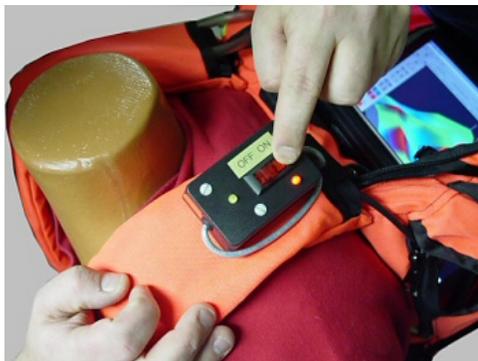


- **Forget unit is ground balancing when in comments screen and antenna not in proper position on ground**



- **Update Java**



- **Scan back and forth**

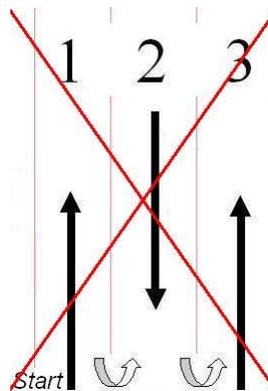

Section VI

Troubleshooting

Improperly charged batteries cause the #1 reason for errors with the USA DISCOVERY. Please be sure that your batteries are fully charged. –DO NOT CHARGE THE BATTERIES FOR MORE THAN 3 HOURS AS THIS MAY CAUSE BATTERY FAULT AND POSSIBLE INJURY. The best way to test for fully charged batteries is to use a Multimeter.

Q. My laptop screen saver came on and an error window appeared. When I closed the window the software closed, where is my data?

A. Since the software is in an always-ready state, disable your screen saver or increase the time prior to activation. To avoid this if you are taking a scan and the screen saver appears while in the middle of a scan, do not close the error window until after you are done with your scan and it is saved. Increase the time in your control panel on the screen saver or disable it completely when taking scans.

Q. I am getting high peaks and low valleys on every scan, why is this?

A. This is caused by the unit rotating at the end of each survey line. Please double check that your sensor is always pointing the same direction. For example, if a scan is being conducted in front of a wall and the connector is pointing towards the wall on the first survey line, on the return survey line, the connector still needs to be pointing towards the wall. This is probably the most common mistake and the data becomes very difficult to interpret.

Q. I am not turning the unit and am still getting high peaks and low valleys on every scan, why?

A. Most probable explanation is that the sensor is at an angle. Loosen the sensor so that it can easily swing back and forth. Let the sensor hang naturally so that it is not at an angle to the ground and that it remains perpendicular the entire time.

Unexploded Ordnances

What is UXO?

UXO, which stands for Unexploded Ordnance, results from the military's use of munitions in training. Military munitions include bullets, bombs, rockets, pyrotechnics, grenades, blasting caps, shells, fuses, pyrotechnic and explosive simulators, and other explosive items. Most military munitions contain some form of propellants, explosives, or pyrotechnic (PEP) mixes to make them function (explode, propel, or produce intense smoke or light) properly. When military munitions do not function as intended (do what it is supposed to do) during use, they normally become Unexploded Ordnance or UXO. Many people also refer to UXO as "duds." These items are extremely dangerous and should never be touched or moved because they can still explode and cause serious injury or death.

What does UXO look like?

Production of military munitions comes in many different sizes, shapes, and colors. Their size and shape depends on how the military intends to use them. (For example: small arms munitions, which are used for training soldiers on how to shoot their individual weapons, like pistols or rifles, are small; artillery and tank rounds, which are used to train soldiers in the use of crew-served weapons, like tanks and artillery weapons, are large; and rockets, fired from helicopters, aircraft or ground vehicles, can vary in size, as can bombs dropped from aircraft.)

Explosives safety experts know that, overtime, the paint on military munitions that have been used in training and that did not function properly (UXO) will wear off or fade. They also know that because UXO are normally exposed to the weather they will normally rust, making them more difficult to spot or recognize.

It is important to know that UXO:

- Come in many shapes and sizes. (Some will look new and other will look old and rusty. Some will look like bullets or bombs. Some will look like pointed metal pipes, soda cans, small balls, or even an old car muffler.)
- May not be easy to spot, most are partially or completely hidden.

UXO can be found:

- On top of the ground, or partially or completely buried in the ground or even by sand or snow.
- In or under high grass or bushes.
- Under water, in lakes or streams or, even, the ocean.
- May be look like a bullet or bomb, or be in many pieces. (Even small pieces of UXO can be fatal)

USA *DISCOVERY* User Manual 7/1/2008

(UXO CONT.)

All UXO should be considered extremely dangerous!

What types of areas would I encounter UXO? What areas are the most dangerous?

Areas that the military uses for weapons training or for testing weapons or munitions are most likely to contain UXO. Signs, like those below, normally mark these areas, which are normally on military installations or bases.

Signs

It is however important to know that some areas that were used in the past to prepare our military for war (i.e., World War I, World War II, the Korean War, and Viet Nam) are no longer used by the military. Some of these areas, from which the government attempted to remove any dangerous UXO, are now being used for other purposes, like recreational or industrial parks, or even housing areas. Some of these areas may also be marked with signs warning that UXO may be found on them.


What should you do if you see UXO?

- 1) Do not continue to move toward a suspected UXO. Some UXO are sensitive to motion and could explode if you come too near.
- 2) Do not move or disturb UXO. It could explode, resulting in injury or death.
- 3) Do not move any object on or near UXO. UXO can become unstable over time and detonate with any motion.
- 4) Note the location. Note the direction, any landmarks, or other features that would aid in locating the UXO.
- 5) Leave the UXO hazard area the same way area was entered. If there is one, there may be more UXO.
- 6) Contact the local law enforcement agency and report the UXO.
- 7) Stay away from areas of known or suspected UXO. Do not enter fenced areas or areas with posted UXO warnings. This is the best way to prevent injury or death.


ALTERNATIVE POWER SUPPLY

Assembly for the Pre-Configured Laptop

1. Using the Vector Power Inverter and supplied wiring harness, assemble the Male/Female adapters as such.

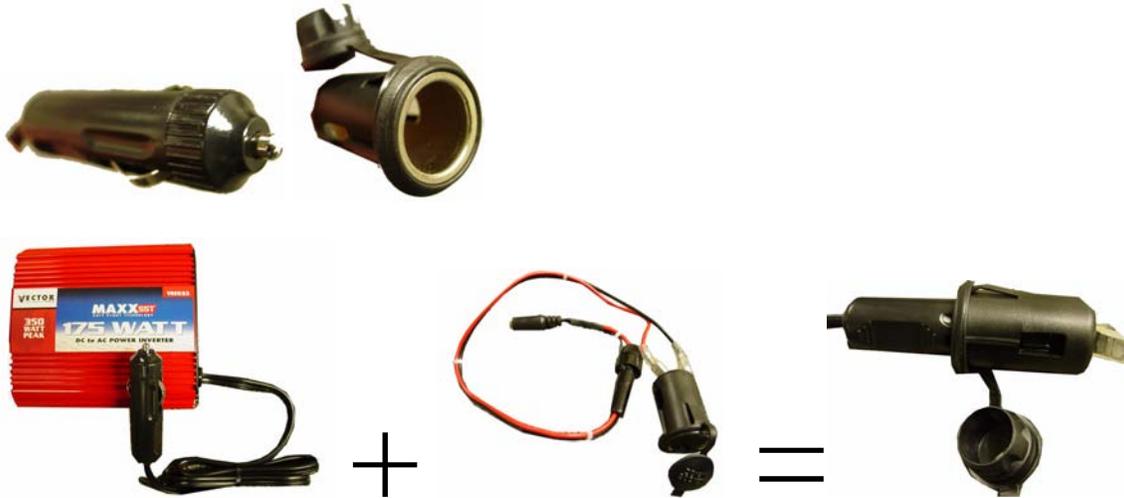

2. Then connect the 12V battery (small thick one) and adapter to the assembled wiring harness connector detailed below

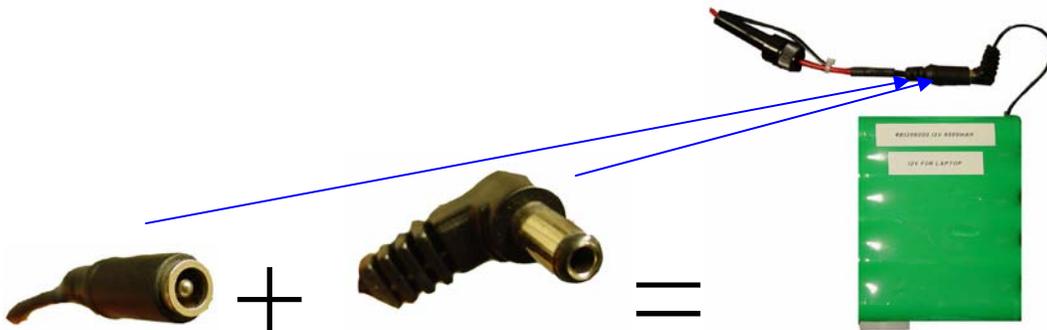

3. The final product should look like below:



(Note) Make sure when charging the green/black control unit battery (24V) and the green/black Alternative power battery (12V) to use the appropriate chargers as indicated below



[24V charger with 24V battery]




[12V charger with 12V battery]

4. After the final product is assembled, you may now connect the Laptop AC Adapter Cord to the Laptop as shown below



AC Adapter plug in



5. Finally plug in the prong-style plug into the Inverter plug in

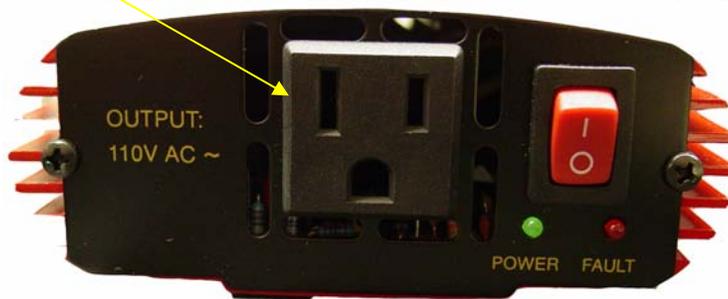


(Note: Laptop Model/Make may differ based on laptop chosen for purchase)


Operation: When all steps have been connected, turn on the above red power switch and let the inverter run till an audible sound is emitted (low voltage warning) At this point, turn off the inverter power switch, and let the Laptop run on its own battery power. The purpose of this setup is to give you an extra (~2-2.5 hours) battery time before running on the laptops main power (~2-4 hours)

How to reset the IP address to talk to the USA Control Unit
WINDOWS VISTA OPERATING SYSTEM

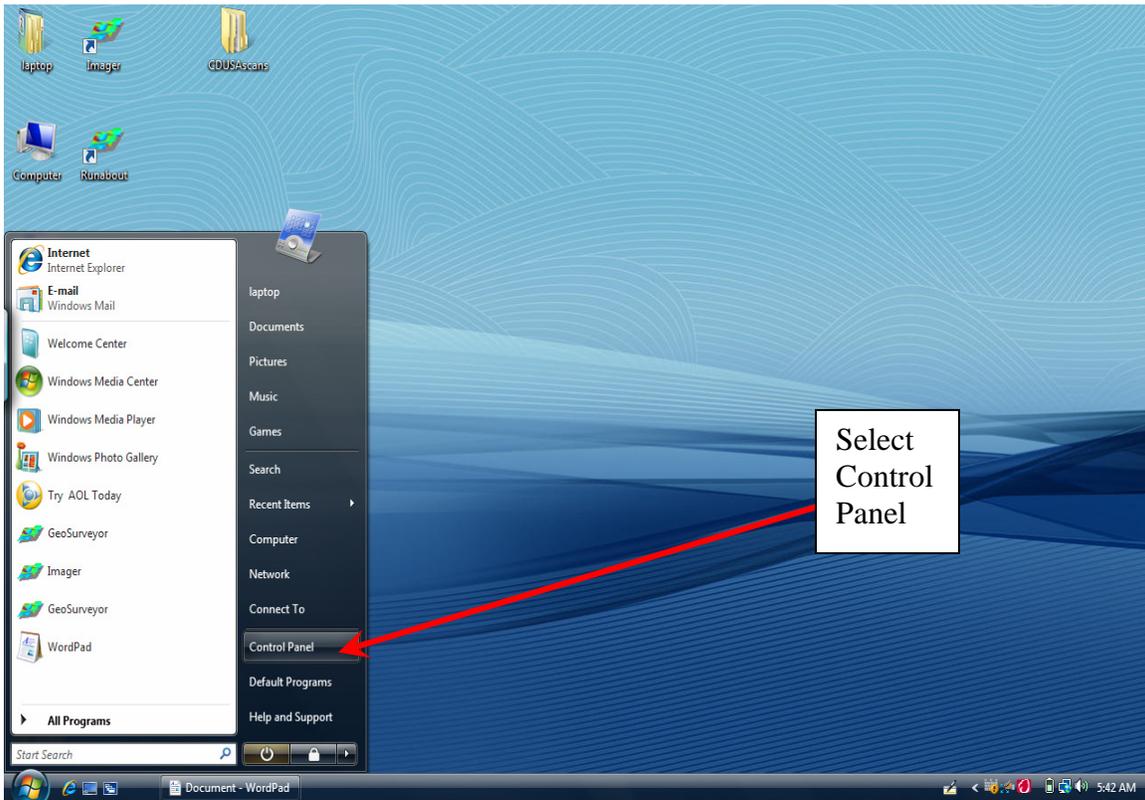
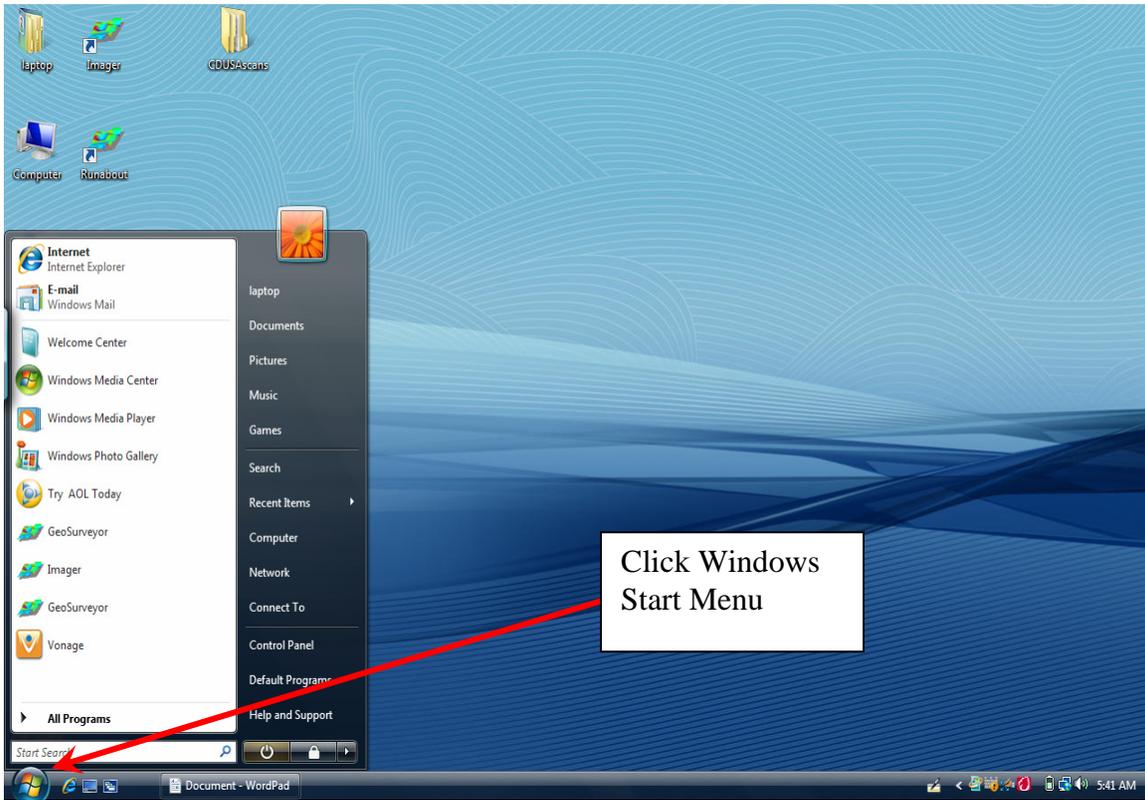



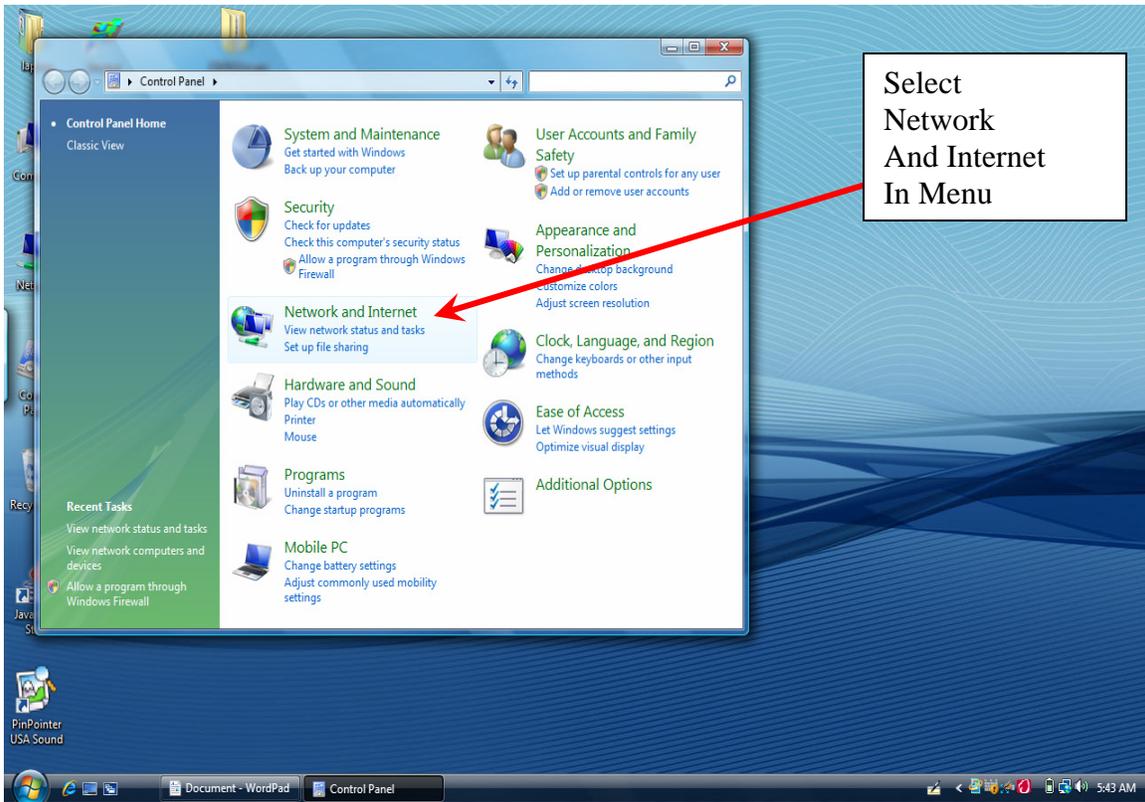




Select Network And Internet In Menu


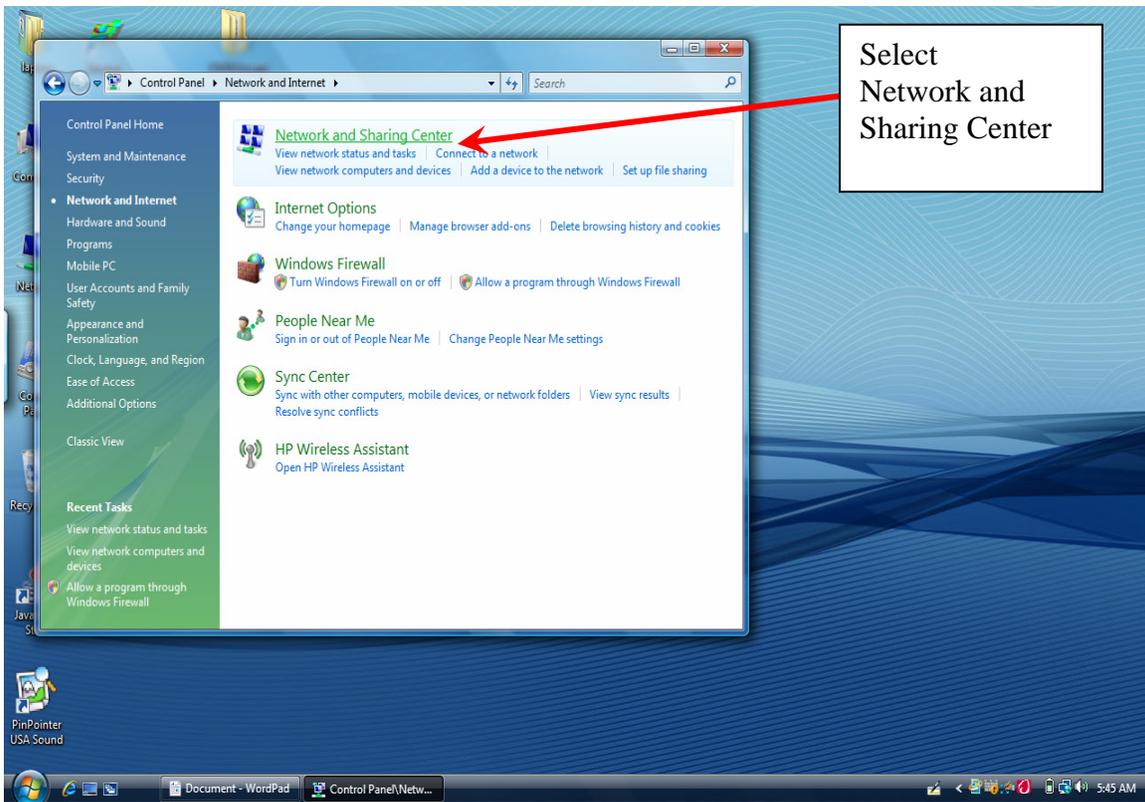


Select Network and Sharing Center

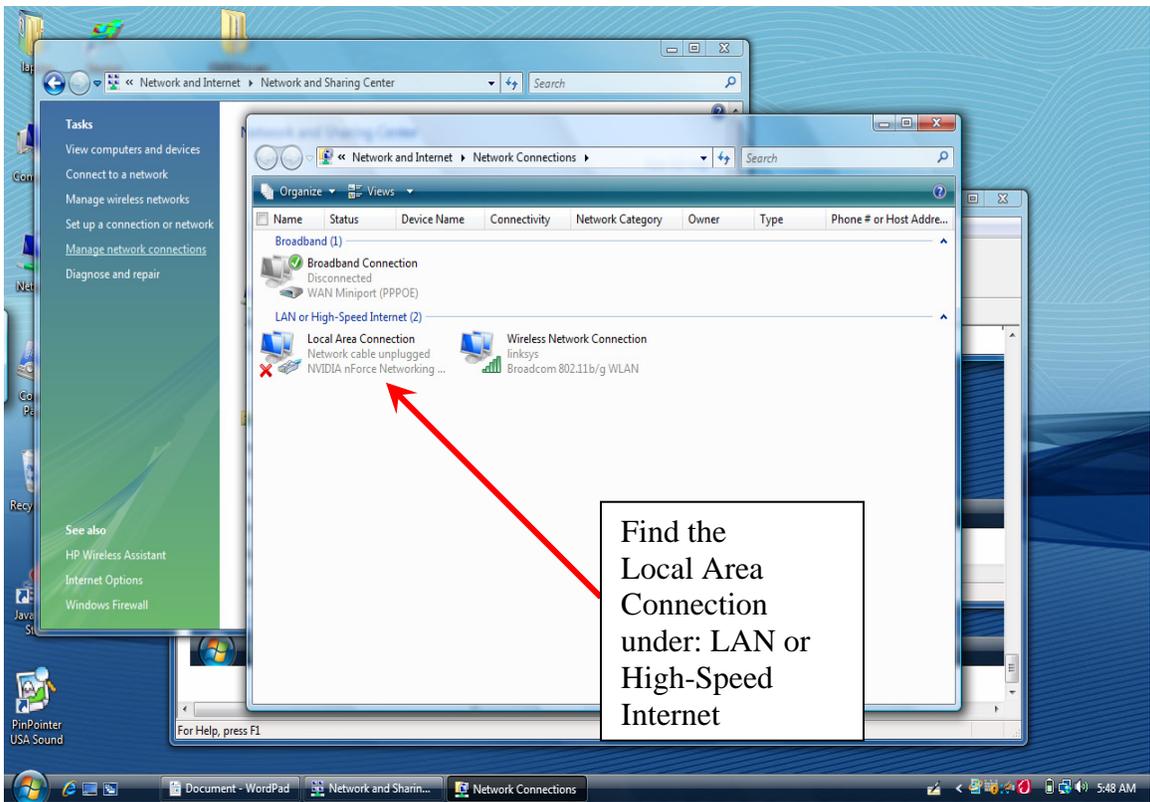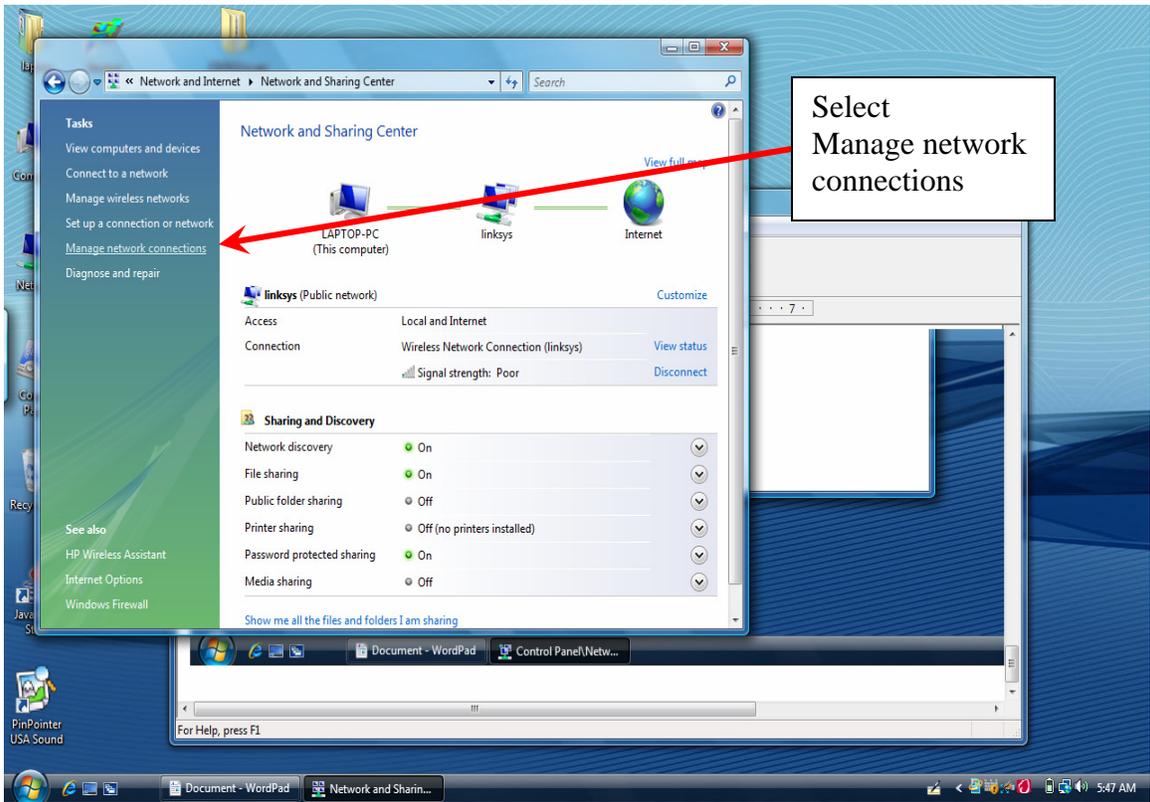

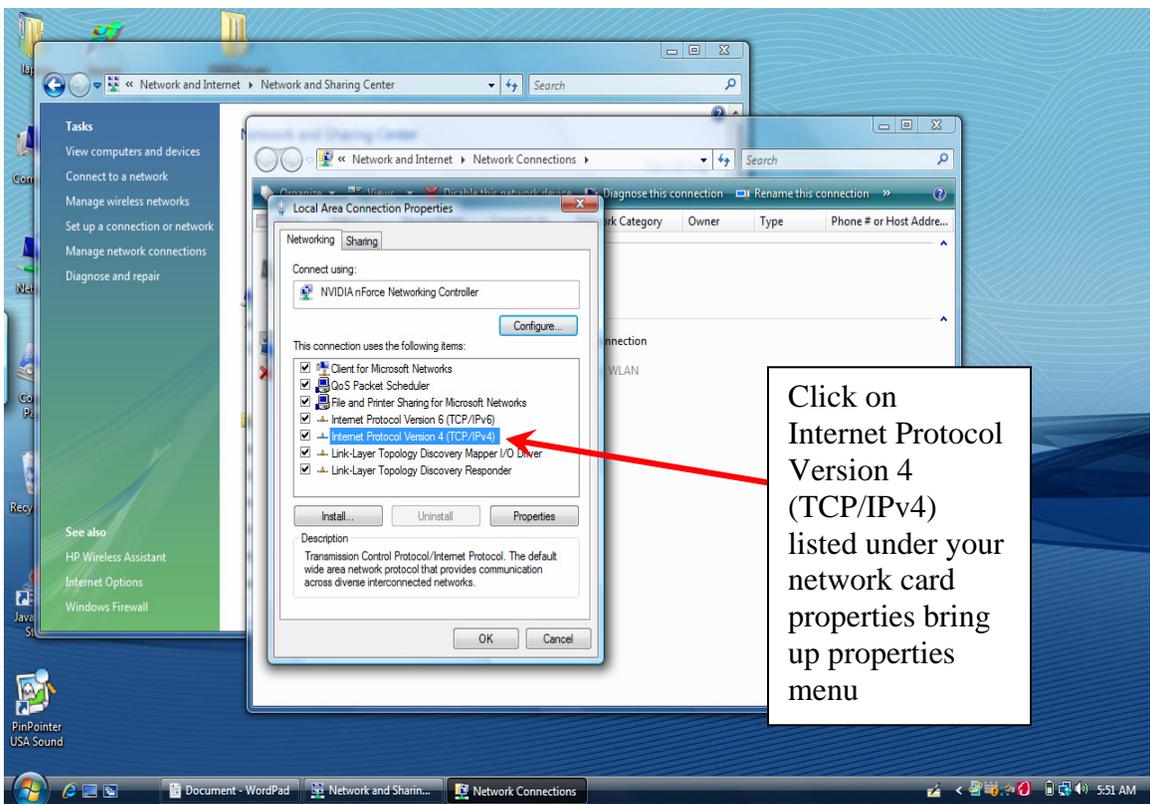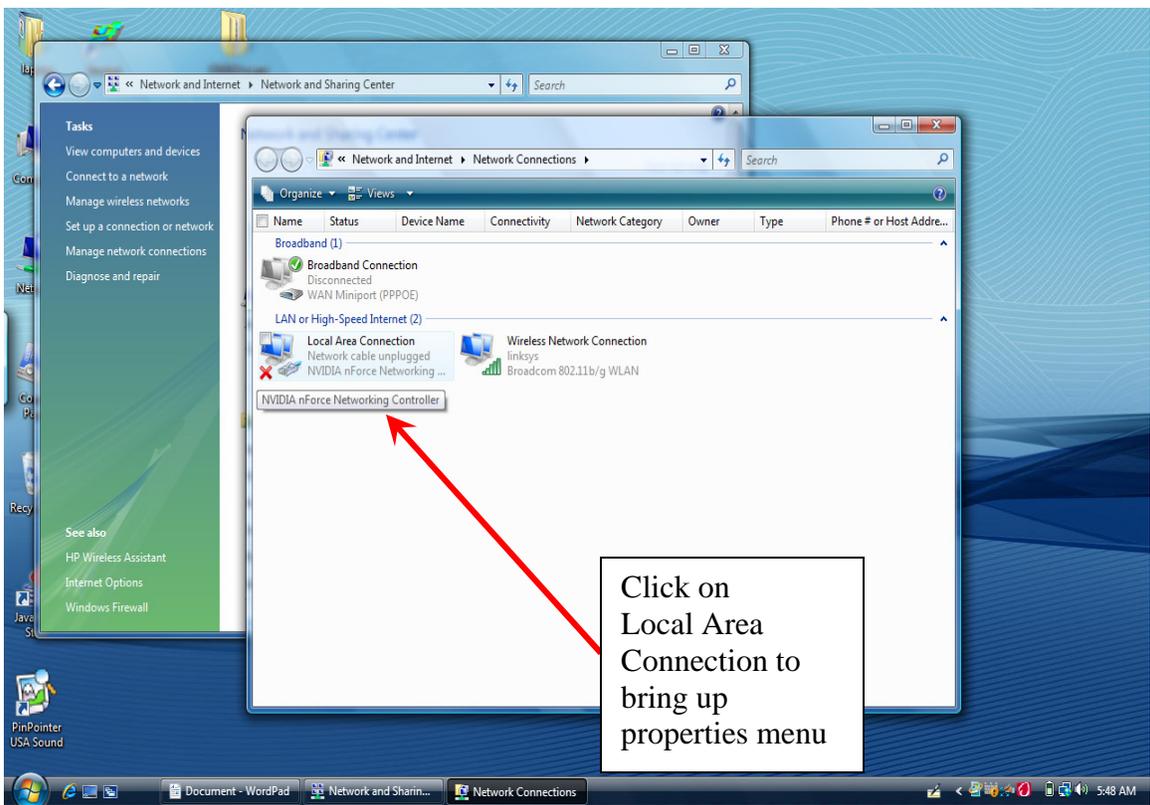


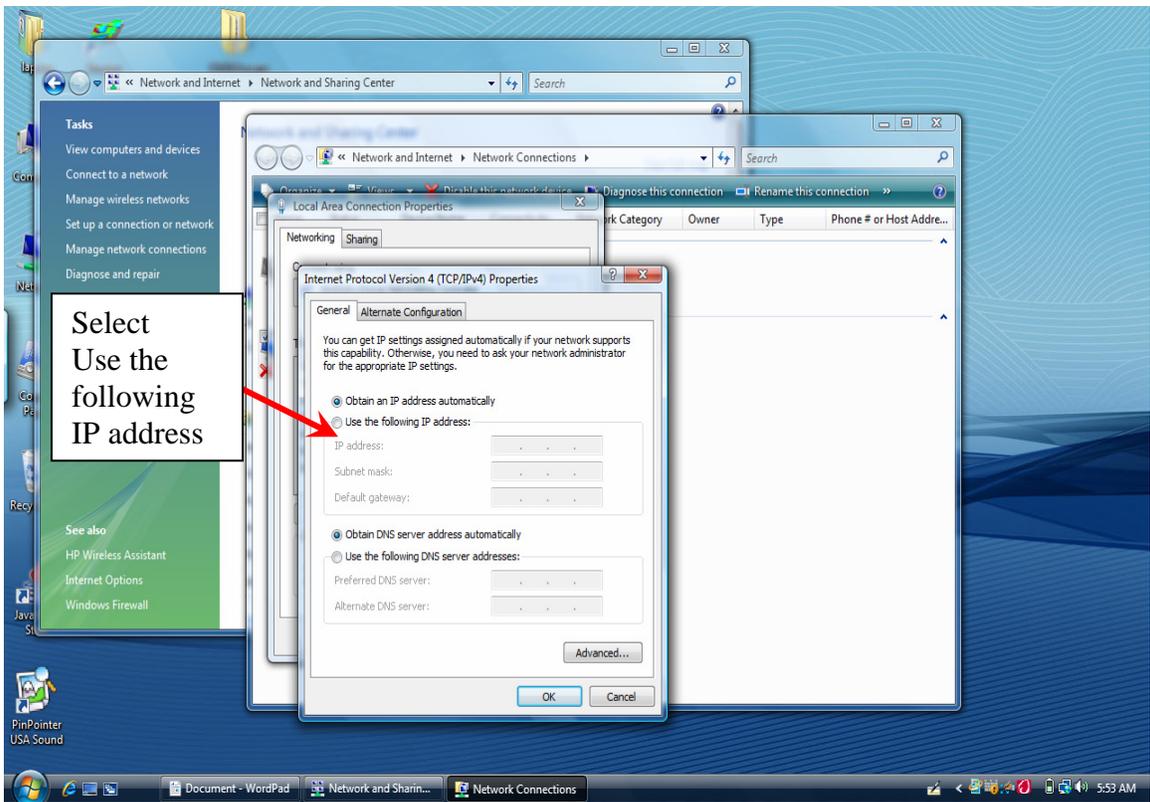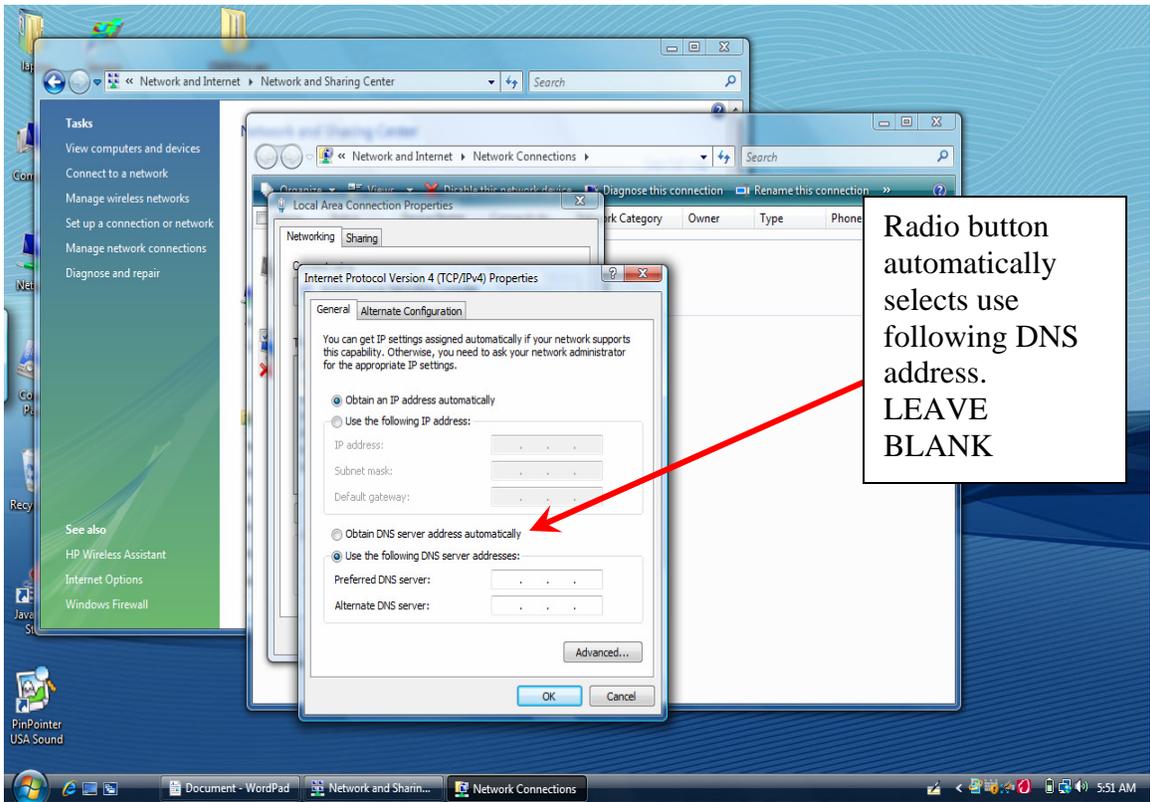

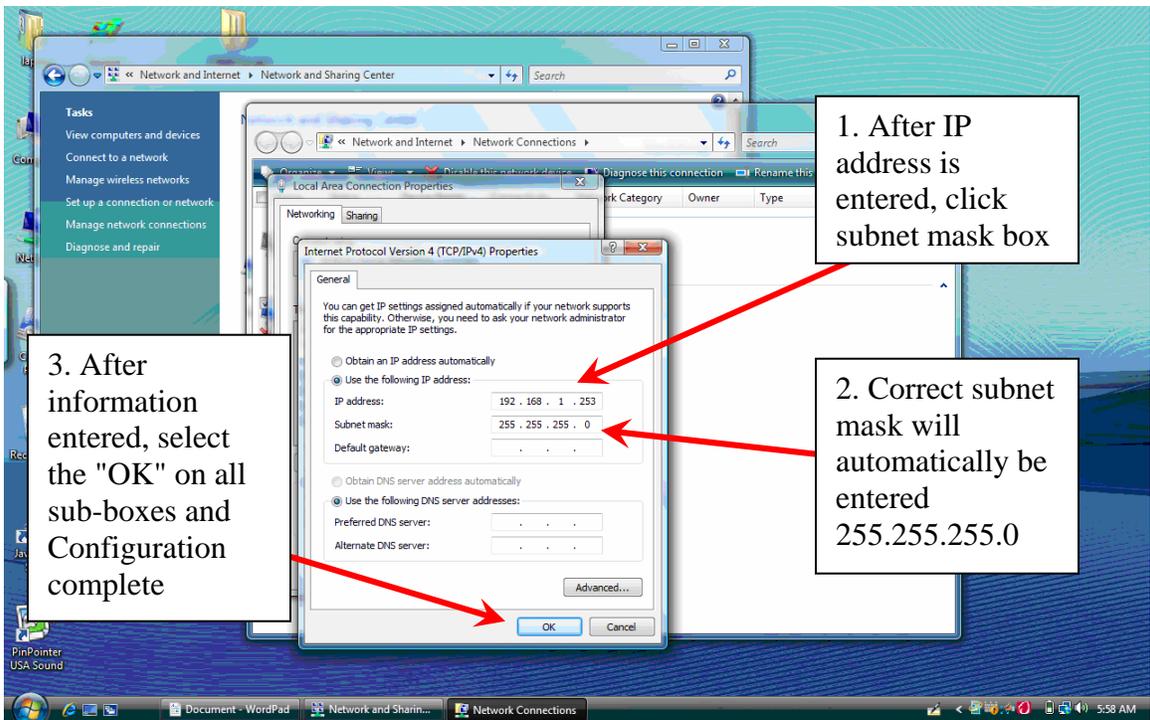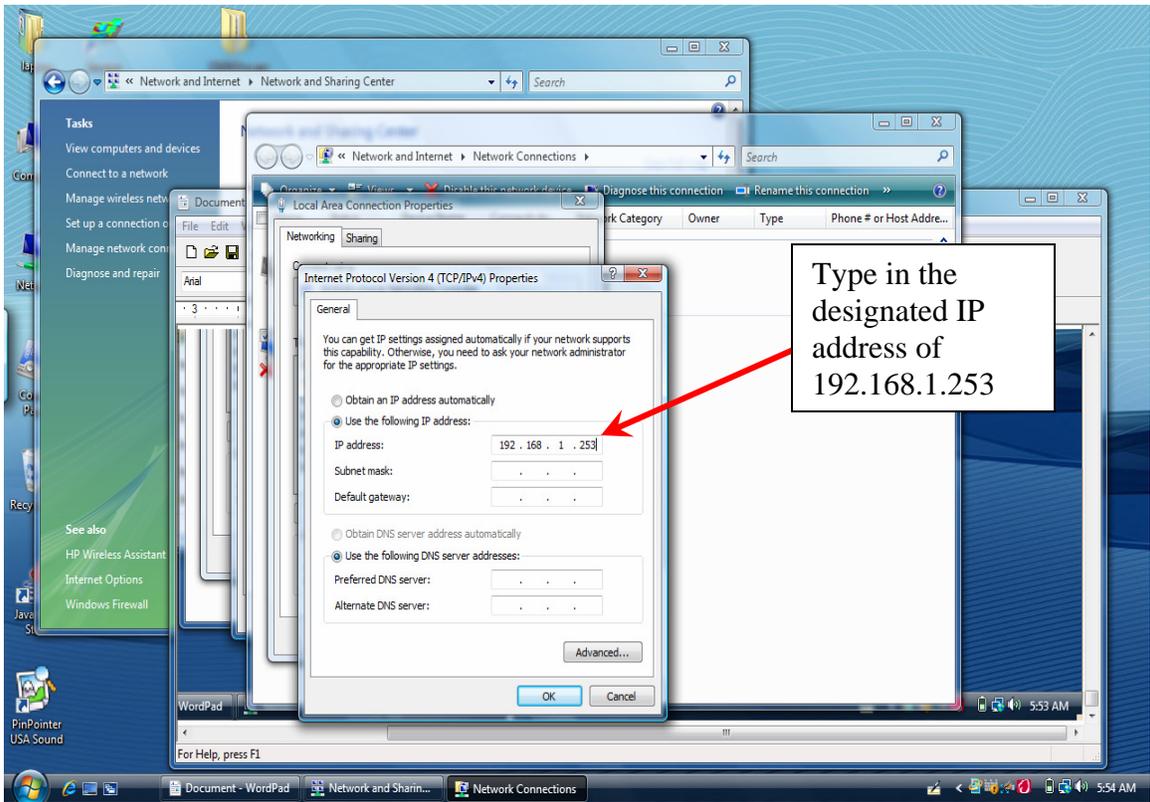

IMPORTANT NOTE: BE SURE TO DISABLE ANY FIREWALL FROM WINDOWS OR OTHER SECURITY SOFTWARE. USA UNIT WILL NOT CONNECT WITH FIREWALL ENABLED.


How to reset the IP address to talk to the control unit WINXP, 2000

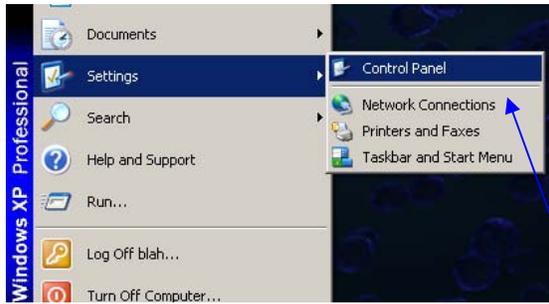


Click on **Start > Settings > Control Panel**




Double Click on **Network Connections**

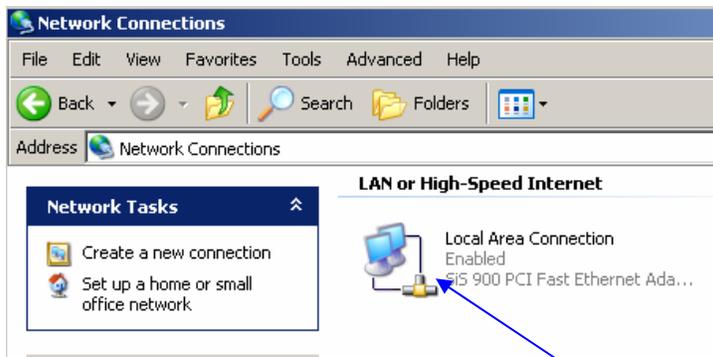


Double Click on **Local Area Connection**

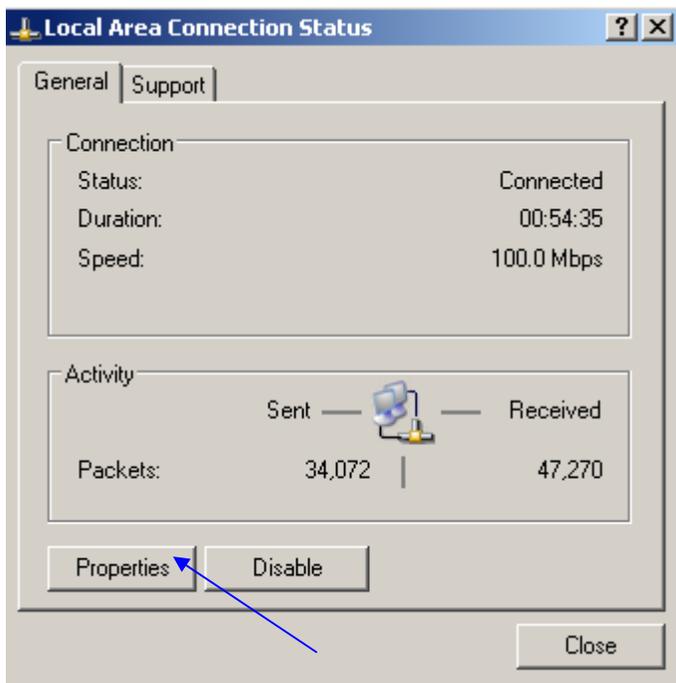

Click on **Properties**

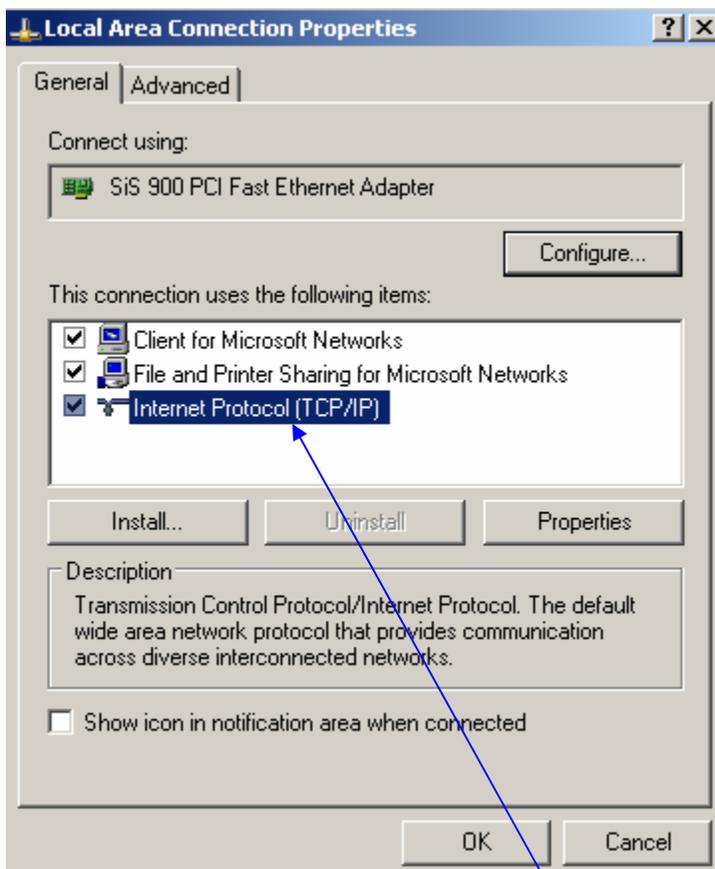

Double Click on **Internet Protocol (TCP/IP)**

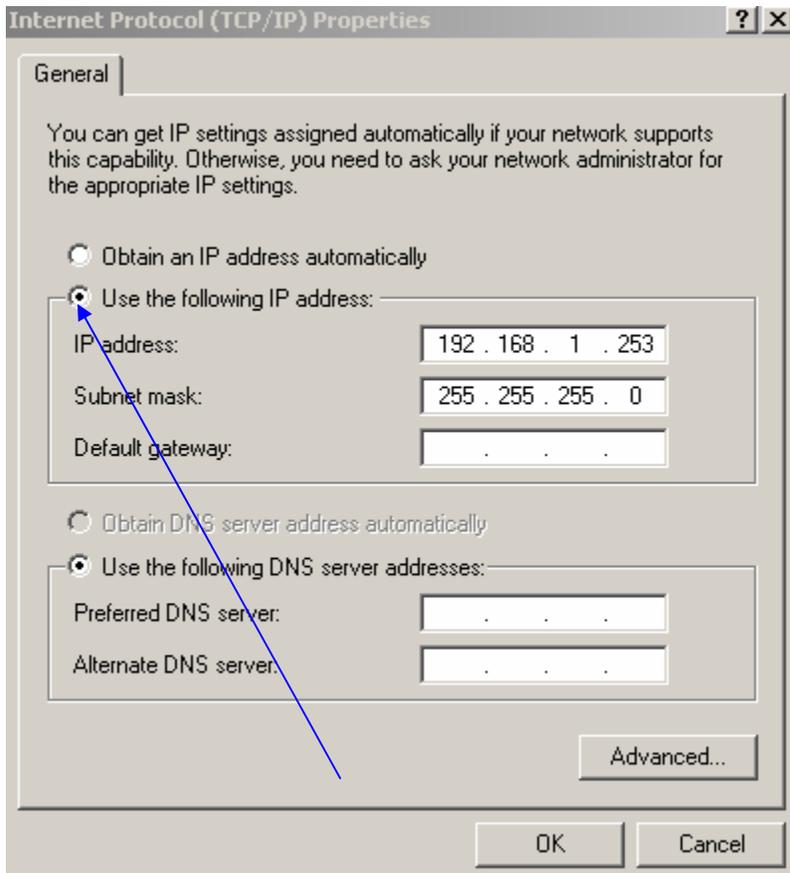

Click on the “**use the following ip address**” selection and set the IP to the above listed parameters in the IP Address Field, then click on the subnet mask line...and the listed above numbers will automatically appear, click on **OK** 2 times, might seem slow during this process as the IP address is changing (be patient) and **close** the remaining dialog boxes open.

IMPORTANT NOTE: BE SURE TO DISABLE ANY FIREWALL FROM WINDOWS OR OTHER SECURITY SOFTWARE. USA UNIT WILL NOT CONNECT WITH FIREWALL ENABLED.

Technical Specifications

USA - DISCOVERY

Control Unit

Control Unit Voltage	12-38 VDC
Current Consumption	250 mA
RAM	32 MB SDRAM
Operating Temperature	32°F - 155°F
Data Transfer Rate	100 MB/S
Battery Run Time	8 Hours
Sensor Current Consumption	max 2.50 mA ±0.50 mA
Control Unit H x W x L	2-3/8" x 5-1/2" x 7" (61mm x 140mm x 179mm)
Control Unit Weight	2.5 lbs (1.14 Kg)
Sensor H x W x L	2" x 2" x 20" (51mm x 51mm x 51cm)
Sensor Weight	1.75 lbs (0.8 Kg)

Laptop Computer min specs*

AMD Athlon XP-M 1000+ / Pentium 4 Equivalent
256 MB DDR (minimum)
20GB Hard Drive (minimum)
10/100 NIC Ethernet Port

Geo Surveyor Software

Supported Operating Systems
Windows XP, Vista, or 2000 Platform

System Requirements

700 MHz+ CPU
256 MB RAM
16 MB Video Card
1 Gig Hard Drive Space

*Laptop makes and model specifications may change without notice.

Training

Training at the Accurate Locators facility in Southern Oregon and Imaging Locators near Las Vegas Nevada is quite extensive and hands on. Training is conducted on a one and one basis. Students learn more and have a better chance of mastering the equipment in a shorter amount of time.

We have indoor and outdoor training areas that are similar to buried anomalies found in other parts of the world. We have targets that are buried in clear soil for learning how to recognize a target and targets in mineralized soil to give an enhanced training experience. One on one instruction on how to be able to identify buried objects and to pinpoint them. Many applications with many features to satisfy even the most adventurous.



For more information on receiving personalized training on Equipment, please contact your sales representative for details.

Limited Manufacturer's Warranty

Accurate Locators Inc. warrants your consumer or industrial product ("Product") against defects in material or workmanship for a period of one (3) years from the date of purchase. If Accurate determines the product to be defective in materials or workmanship, Accurate will replace or repair the product to the original purchaser only. To obtain warranty service worldwide, call +1 541-326-4169 or visit us at www accuratelocators.com. Please include a written description of the problem encountered. A Return Merchandise Authorization ("RMA") will need to be obtained prior to returning the equipment. If equipment is returned without a RMA it will not be accepted.

REPLACEMENT OF THIS PRODUCT AS PROVIDED UNDER THIS LIMITED WARRANTY SHALL BE THE EXCLUSIVE REMEDY OF THE CONSUMER. ACCURATE SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGES, INCLUDING CONSEQUENTIAL, INDERECT AND INCEDENTAL DAMAGES, ARISING OUT OF THE USE OF, OR INABILITY TO USE, THE PRODUCT OR FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OR CONDITION ON THIS PRODUCT. EXCEPT TO THE EXTENT PROHIBITED BY LAW, ANY IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

Some stats/jurisdictions do not allow limitations on how long an implied warranty or condition lasts or exclusions or limitation or consequential or incidental damages, so the above limitation or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state in the U.S. and Puerto Rico or from province to province or territory in Canada.

Accurate's warranty is for repair or replacement only of products that proves to be defective in workmanship or material subject to the warranty period and any other conditions set forth on the package. In some cases manufacturer's warranty may supersede Accurate Locators warranty. Physically damaged merchandise or merchandise where control seals are removed or damaged is not covered under warranty. Customer is responsible for all shipping costs to and from Accurate Locators.

Accurate Locators, Inc
1383 2nd Ave.
Gold Hill, OR 97525 USA

Technical Support: accurate@accuratelocators.com
+1 541 326-4169